

66-  
This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):


- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)
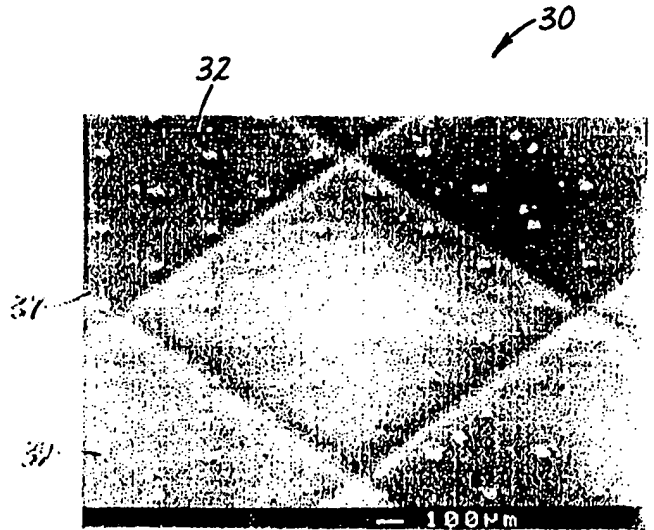
<b>(51) International Patent Classification <sup>6</sup> :</b>  <b>C09J 7/02</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/29516</b>  <b>(43) International Publication Date:</b> 9 July 1998 (09.07.98)
<b>(21) International Application Number:</b> PCT/US97/09274  <b>(22) International Filing Date:</b> 30 May 1997 (30.05.97)  <b>(30) Priority Data:</b> 08/775,844                      31 December 1996 (31.12.96)      US  <b>(71) Applicant:</b> MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).  <b>(72) Inventors:</b> SHER, Frank, T.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). MEIXNER, Larry, A.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). LONCAR, Francis, V., Jr.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). CALHOUN, Clyde, D.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US).  <b>(74) Agents:</b> HORNICKEL, John, H. et al.; Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> ADHESIVES HAVING A MICROREPLICATED TOPOGRAPHY AND METHODS OF MAKING AND USING SAME  <div style="text-align: center;">  </div> <b>(57) Abstract</b>  <p>Adhesives having a microreplicated topography are prepared from contacting a microembossed pattern to a layer of adhesive. When an adhesion interface is established between the layer of adhesive and a supporting substrate, the topography of the adhesive surface controls the performance of the adhesion interface. Articles having microreplicated adhesive surfaces are also disclosed that have an advantage of providing microchannels for fluids egress for an effective period of time. Multiple microembossed patterns produce microreplicated adhesive surfaces having both microchannels for fluid egress and pegs for improved adhesive properties.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LJ	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

5

**Adhesives Having A Microreplicated Topography  
and Methods of Making and Using Same**

Field of Invention

10

This invention relates to adhesives having a controlled topographical surface of microchannels and the methods of making and using them.

Background of Invention

15

Pressure sensitive adhesives are useful for the joining of two materials. The interfaces between the adhesive and the materials are vital to the performance of the joined materials. The loss of adhesion at either interface can doom the usage of the materials.

20

One example of an adhesion interface requiring peak performance is a durable film displaying image graphics adhered to substrates, where the film is a backing material upon which an adhesive layer is added for adhesion to the substrate. Adhesion of a large image graphic film to substrates encounters the problem of entrapped air between the film and the substrate. Anyone who has ever attempted to hang wallpaper can appreciate the frustration that can arise when entrapped air beneath an adhesive-backed film can not be removed easily. The most common solutions to this problem are to remove and reapply the film or to perforate the film to release the entrapped air. Multiple attempts to adhere the same film to a substrate can compromise the pressure sensitive adhesive or increase the probability of uneven or misaligned film on the substrate. Perforating a film mars its appearance. The removal of air bubbles is also labor intensive.

25

30

Prior approaches have addressed facile adhesion of image graphics film to substrate by concentrating on specialized topographical constructions of the pressure sensitive adhesive. Commercially superior pressure sensitive adhesives

for image graphics are available on image graphic films by 3M of St. Paul, Minnesota, USA. Pressure sensitive adhesives having this utility are disclosed in a variety of patents. Representative examples of patents describing such materials include U.S. Patent Nos. 5,296,277 and 5,362,516 (both Wilson et al.) and  
5 5,141,790 (Calhoun et al.). These patents disclose how the adhesive's topography is built from the interface between the adhesive and the release liner. The principal topographical features in the adhesive surface are isolated protrusions from the adhesive surface with identified contact areas.

Another approach to topographical adhesives is the formation of  
10 ridges or recesses in a release or transfer liner to generate a temporary topography on the adhesive. For example, British Patent Specification 1,511,060 discloses a heat- and pressure sensitive adhesive on an impermeable backing that is formed by application of heat and pressure and a release liner having a specific topography or by coating the adhesive onto the release liner, whereupon the release liner is  
15 removed. Then, bonding of the adhesive to the desired substrate also requires a step of heat and pressure that adheres the adhesive layer to the substrate. This step is also required to improve the appearance of the final product. This complicated procedure of generating the adhesion of the layer to the backing and then generating the adhesion to the final substrate minimizes utility of the construction  
20 for use in large format graphics and other industrial requirements. Furthermore, the depth of the recesses used to create an effective temporary topography on the nontacky adhesive surface is at least 45 $\mu$ m, and then only if the width of the recesses is at least 130  $\mu$ m.

Another example of a temporary topography formed on an adhesive  
25 surface is disclosed in U.S. Pat. Nos. 5,344,681 and 5,449,540 (both Calhoun et al.). A segmented pressure-sensitive adhesive transfer tape is designed to prevent lateral flow of the adhesive prior to transfer but allows flow after transfer to form a continuous adhesive bond. The small adhesive segments have controllable thickness. An adhesive transfer tape comprises: a carrier with two opposed surfaces  
30 with one containing a series of recesses and the other being relatively smooth; a pressure sensitive adhesive being present in the recesses which are surrounded by

an adhesive free area such that when the tape is wound about itself with the surfaces contacting and then unwound, adhesive transfers from the one surface to the other. Preferably, the recesses are formed by embossing and are in spaced-apart relationship. Preferably, they are oval, circular, polygonal or rectangular in cross section. Preferably, the adhesive is acrylic or rubber resin, pressure sensitive.

Another example of a temporary topography formed on an adhesive surface is disclosed in U.S. Pat. No. 5,268,228 (Orr). A double-sided adhesive-coated tape has fine grooves on one or both sides of the tape to facilitate air venting to minimize non-contact areas. The grooves in the tape are fine enough that, once the two surfaces to be bonded are in position, the grooves largely or completely disappear. Example 1 describes scribing lines through a protective sheet that placed grooves 70-150 microns deep in the underlying adhesive surface.

#### Summary of the Invention

Desirable topographical adhesives face three limiting conditions to solve problems in the art of adhering one material to another, especially large format graphics on supporting substrates having large flat surfaces interrupted by rivets, seams, and the like:

(1) An adhesive without channels provides no effective route for egress of fluids in the X-Y dimensions of the interface between the adhesive and the substrate, especially if the backing material, adhesive, and/or the substrate are fluid-impermeable. But if the channels are too large, a path of fluid egress could also be a path of passive ingress of the same or other fluids.

(2) The backing material, and especially its outer imagable surface, can not be adversely affected by the adhesive topography chosen, thereby limiting the size of the channels in the adhesive and also limiting the method of construction. The backing material needs a flat, uniform surface for imaging and other aesthetic reasons. The formation of large channels into the laminate of backing and adhesive will adversely disrupt the flat, uniform surface of the backing material. Also, adhesive topographies that are too large will create undesired undulations or other imperfections in the appearance of the backing material on the

final substrate. Such undulations or other imperfections make the image graphic unacceptable for most commercial markets.

(3) The area of adhesive actually contacting the substrate and the holding power (i.e., shear and peel adhesion) of the adhesive affect bonding performance of the backing material to the substrate. If either the holding power is too weak or the area of the adhesive contact is too small, or both, the performance of the adhesive is entirely inadequate. Microspheres or other large abrupt surface patterns have been used to reduce the area of adhesive surface on the substrate, either temporarily or permanently, which can affect holding power of the adhesive or area of adhesive contact. If the size of the surface features is increased, air channels in the topography are formed but there is insufficient adhesive interface remaining to provide effective permanent adhesion.

While the air bubble and fluid egress problems associated with large format graphics are easy to understand, these problems also exist for small graphics and decals where speed of application or applications without pre-masking are significant for economic or manufacturing considerations.

The problem of fluid egress is even more acute whenever the two materials contacting the adhesive effectively inhibit any egress in the Z axis through either or both materials. Further if the materials are inflexible as well as fluid impermeable, such as metallic plates, there is no avenue that can be created, during application, for fluid egress.

The art needs a different approach to control adhesion at the interfaces between a pressure sensitive adhesive and two materials within the three enumerated limiting conditions. Indeed, the art needs to engineer the geometry of the adhesive surface to provide a controlled topography of the adhesive surface at any adhesion interface where particular performance is required.

For this invention, that particular performance should include the provision for fluid egress in the X-Y dimensions of the adhesive interface but without adversely affecting the desired appearance of the backing material which should remain flat and uniform for imaging, but preferably conformable during

use. Further, fluid egress should be reconciled with adhesive bond strength for maintaining an adhesive interface.

One aspect of the present invention provides a means of controlling the topography of an adhesive surface, comprising contacting a microembossed pattern to a layer of adhesive and forming a microreplicated surface, such that when an adhesion interface is established between the layer of adhesive and a supporting substrate, the topography of the adhesive surface controls the performance of the adhesion interface between that adhesive and the supporting substrate.

“Adhesive” means any form of adhesive that has pressure sensitive adhesive properties at the time of application to a supporting substrate. As identified by the Pressure Sensitive Tape Council, a pressure sensitive adhesive requires firm adhesion to a variety of dissimilar surfaces upon mere contact without need of more than finger or hand pressure.

Another aspect of the present invention provides a microreplicated adhesive surface formed by microreplication from any contacting technique such as casting, coating, or compressing techniques. Microreplication can be achieved by at least any of (1) casting using a tool having a microembossed pattern, (2) coating of an adhesive onto a release liner having that microembossed pattern, or (3) passing through a nip roll to compress pressure sensitive adhesive against a release liner having that microembossed pattern. Desired embossing topography can be formed in tools via any of a number of well-known techniques, selected depending in part upon the tool material and features of the desired topography. Illustrative techniques include etching (e.g., via chemical etching, mechanical etching, or other ablative means such as laser ablation or reactive ion etching, etc.), photolithography, stereolithography, micromachining, knurling (e.g., cutting knurling or acid enhanced knurling), scoring or cutting, etc.

The microreplicated topography resides on at least one major surface of the pressure sensitive adhesive and can optionally reside on both major, opposing surfaces of the adhesive affecting the properties of the interface(s) in the same or different manners, as desired by those skilled in the art.



When a microembossed liner is used, the liner can be a release liner (e.g., a releasable storage liner for the adhesive or a transfer liner for moving the adhesive from one location to another) or a tape backing on a self-wound roll that also serves as a liner, such that the microembossed surface of the tape backing  
5 microreplicates the surface of the adhesive exposed as the tape is unwound.

“Microembossed” means a topography on the liner or the casting tooling having an effective three-dimensional pattern that generates a maximum difference of less than about 45 $\mu$ m in surface planar dimension in a continuous adhesive. The pattern can be interconnected or continuously parallel.

10 “Interconnected” means that at least two three-dimensional features in the microembossed pattern intersect causing the microreplicated formation of an intersection of the inverse of such three-dimensional features in the adhesive surface.

“Microreplicated adhesive” means adhesive having a topography in  
15 at least one major, substantially continuous surface that is essentially, but not necessarily perfectly, the inverse of the microembossed pattern to which the adhesive surface is contacted and has a contact area of at least about 35%.

“Pattern” means any formation of embossings that can utilize any theory of geometry, including without limitation, Euclidian geometry and fractal  
20 geometry.

Optionally, the microembossed patterns can be multiple. “Multiple” means two or more embossing patterns are superimposed on the liner to create a complex pattern of differing depths or heights of embossing to form the microreplicated adhesive having a complex pattern of differing depths or heights.

25 Another aspect of the present invention is an article having a microreplicated adhesive of the present invention.

The microembossed liners, tools, or nip rolls used to make microreplicated adhesive of the present invention can provide a vast array of microreplication combinations given the multitude of microembossed patterns, the  
30 multiplicity of embossings, and the variety of materials available.

A feature of microreplicated adhesives of the present invention is that the microembossed pattern is retained for an effective period of time on the microreplicated adhesive surface during intended use. The retention of microreplication can range from minutes to years depending upon the rheology of the pressure sensitive adhesive chosen and the conditions of application. Fluid egress may only be desired for limited times.

The invention not only provides a three-dimensional topography for pressure sensitive adhesives, but because of the unusual properties of pressure sensitive adhesives, their flow characteristics can be engineered. Therefore, the invention also contemplates the effective use of the pressure sensitive adhesive chemistry and substrate application techniques to control the fourth dimension, how long after substrate application the surface of the adhesive remains three-dimensional. The topography need not be permanent. For example, it can be desired to collapse any portion of the adhesive interface after sufficient fluid egress is completed.

Another feature of the microreplicated adhesive topography is the ability to control the engineering of the adhesive surface for desired uses, such as air bleeding from large image graphics, plasticizer migration routes from plastic materials, and other applications that require fluid transport in the X-Y dimensions of the adhesive interface(s) rather than the Z axis from the surface of the adhesive. In other words, aerodynamics of the adhesive interface can be engineered as required.

Another feature of the microreplicated adhesive, when using multiple microembossed patterns, is the ability to control the types of materials introduced into recesses of differing depths in the topography for complex adhesion usages, such as positionability as that disclosed in U.S. Patent Nos. 5,296,277 and 5,362,516 (both Wilson et al.) and 5,141,790 (Calhoun et al.) and PCT Patent Application Serial No. WO US96/1687.

An advantage of the present invention is the creation of an engineered adhesive surface that serves specific intended uses for a controlled period of time when transferred or adhered to another material.

Another advantage of the present invention is a pressure sensitive adhesive that provides effective fluid egress without adversely affecting the appearance of the backing material which that adhesive adheres to a substrate.

Another advantage of the present invention is the ability of the adhesive surface(s) to exhaust fluids such as gases, entrapped air, plasticizers, or moisture from the plane of the adhesive surface independent of specialized compositions or formulations of the adhesive.

Another advantage of the present invention is the formation of the same or different adhesive topographies to each of the opposing major surfaces of the adhesive. For example, one adhesive interface could provide plasticizer migration from one engineered topography and the opposing major surface could provide fluid egress from a second engineered topography.

Another advantage of the present invention is the ability of the adhesive surface(s) to permit controlled ingress of fluids at a desired time to affect the adhesive interface(s), such as to facilitate removal, alter surface characteristics, provide additional remedial treatments, and the like.

Other features and advantages will become apparent from the embodiments of the invention described in relation to the following drawings.

## Brief Description of Drawings

Fig. 1 is a scanning electron micrograph of a double microembossed liner that has been used to make an adhesive surface of the present invention.

Fig. 2 is a scanning electron micrograph of the double microembossed liner of Fig. 1 at a higher magnification.

Fig. 3 is a scanning electron micrograph of a microreplicated adhesive surface of the present invention.

Fig. 4 is a scanning electron micrograph of the microreplicated adhesive surface of Fig. 3 at a higher magnification.

Embodiments of Invention

Fig. 1 shows an example of the complex topography that can be created on liners. This scanning electron micrograph shows a liner 20 having a surface 22 with one pattern 24 of embossings and optionally a second pattern 26 of embossings. More than one optional pattern can be added according the techniques disclosed in copending PCT Patent Application Serial No. \_\_\_\_\_ (Calhoun et al.) (Attorney Docket 52773PCT3A).

A careful viewing of Fig. 1 shows pattern 24 comprising both relatively planar lands 27, i.e., large squares that have been depressed from the initial surface 22 of liner 20 and a series of ridges 28 formed from the material moved from the lands 27 during the embossing process. Pattern 26 forms an array of depressions 29.

If multiple embossing patterns are desired, the manufacturing process reverses the order of embossings, with the required pattern(s) coming last. The manufacturing of the double embossed liner 20 actually requires the formation of the second embossing pattern 26 first, followed by the formation of the required first embossing pattern 24, second. Between the time of making the two embossing patterns, a desired material can be introduced into optional second embossing pattern 26, such as glass beads, in a manner as disclosed in U. S. Pat. No. 5,296,277 (Wilson et al.).

The resulting multiple microembossed liner 20 has a total area "T", a first area "A" for lands 27 created during embossing of pattern 24, and an area "B" for ridges 28 created during embossing of pattern 24, and an area "C" for depressions 29 residing in both lands 27 and ridges 28. Fig. 2 shows how one depression 29 can reside in a ridge 28. Thus,  $T = A+B$  and all of area C resides within either area A or B, or both.

The patterns 24 and 26 can be varied according to requirements in the art recognizing that the patterns are superimposed on one another. For example, in Fig. 1, lands 27 are discontinuous, because separate projections on the tooling for forming pattern 24 do not intersect with one another. Likewise,

depressions 29 are discontinuous because separate projections on the tooling for forming pattern 26 do not intersect with one another.

The result of pattern 24 creates separated lands 27 from one another, and the result of pattern 26 creates separated depressions 29 from one another. The  
5 interconnected ridges 28 are a by-product of the embossing of separated lands 27.

In other words, the topography of the tool(s) is an obverse image of the final topography of the microreplicated adhesive, with the liner 20 serving as the inverse image for transferring the image of the tool(s) to the microreplicated  
10 adhesive. Therefore, the topography(ies) of the embossing tool(s) for liner 20 is essentially the topography of the microreplicated adhesive.

For the embodiment of adhesive to be produced from patterns 24 and 26, the percentage area of lands 27 to surface 22 (A to T) can range from about 35% to about 99%. Desirably, the percentage can range from about 50% to  
15 about 98%. Preferably, the percentage can range from about 60% to about 97%. More preferably, the percentage can range from about 70% to about 96%. Most preferably, the percentage of A to T can range from about 85% to about 95% to provide adequate fluid egress without adversely affecting adhesion to the supporting substrate. In other words, the percentage of A to T essentially  
20 determines contact area for the microreplicated adhesive on the supporting substrate. The percentage areas, respectively, of interconnected ridges 28 to surface 22 (B to T) are the remainders, respectively.

The percentage area of depressions 29 to surface 22 (C to T) can range from about 1% to about 70%. Preferably, the percentage can range from  
25 about 2% to about 25%. Most preferably, the percentage of C to T can range from about 3% to about 15% because of a balance of repositionability of the adhesive to final adhesive bond strength.

These percentages expressed with respect to the liner 20 cause approximately the same percentages on the inverted topography of the  
30 microreplicated adhesive. However, as described in U.S. Pat. No. 5,296,277 (Wilson et al.), the planar adhesive surface of their pegs is important. Therefore,

the present invention is not limited by these percentages concerning the area of depressions 29 when creating the volume of depressions 29 or the geometry used to achieve those depressions. In other words, the depressions 29 can assume any solid geometric desired by those skilled in the art, within the percentage areas  
5 expressed above.

The embossing of pattern 24 to create lands 27 moves material into ridges 28. Like the formation of mountains from the movement of large land masses, ridges 28 rise from surface 22. While the depth of embossing of lands only results in a depth of a few micrometers, ridges rise from surface 22 to a height  
10 ranging range from about 3 to about 45  $\mu\text{m}$ , preferably from about 5 to about 30  $\mu\text{m}$ , and most preferably from about 6 to about 20  $\mu\text{m}$ .

The depth of embossings for optional pattern 26 can range from about 4 to about 200  $\mu\text{m}$ , preferably from about 8 to about 100  $\mu\text{m}$ , and most preferably from about 10 to about 30  $\mu\text{m}$ . Because the embossing of pattern 26  
15 occurs before the embossing of pattern 24, the depths identified here are cumulative effect of both embossings, not necessarily the height of embossing tool.

Moreover, it should be apparent to those skilled in the art that the size of the embossing tooling needed may exceed the depth of embossing desired because of viscoelastic properties of the liner 20 being embossed.

20 The "sidewalls" of embossings for any of pattern 24, pattern 26, or any combination of them, can be any shape desired, ranging from a constant radius of curvature to any polygonal shape of at least 2 surfaces within the pattern 24 or 26. Nonlimiting examples of shapes of embossing, in cross-section, include curved, rectangular, trapezoidal, triangular, bimodal, and the like. U.S. Pat. No.  
25 5,296,277 (Wilson et al.) describes some of the variables to be considered when forming depressions 29 in order to provide pegs in the microreplicated adhesive.

The width of embossings in any of pattern 24, pattern 26, or any combination of them, can vary as needed. For example, in Fig. 1, the width of embossings that create lands 27 and depressions 29 are relatively uniform for  
30 surface 22. However, the pattern can vary across surface 22 for fluid egress, not unlike a tributary-river configuration in a watershed.

For example, to create microchannels for fluid egress, one could use a liner 20 having a pattern 24 creating ridges 28 having a final width, after viscoelastic properties have reached equilibrium, of less than about 200  $\mu\text{m}$  and preferably from about 50 to 120  $\mu\text{m}$ . The ridges 28 in Fig. 1 are about 100  $\mu\text{m}$  wide.

Precision of topographical formation of liner 20 can be achieved using a variety of machining techniques. The machine tool industry is capable of creating tools with any pattern desired by those skilled in the art. Euclidean geometric patterns can be formed with any pattern of size, shape and depth of embossing projection in any number of steps.

Tools can range from planar presses to cylindrical drums to other curvilinear shapes, depending on how it is desired to employ the embossing steps.

Nonlimiting examples of sources of tooling include commercial sources of photolithographic printing plates and cylinders, precision engraved plates and cylinders, laser machined plates and cylinders, and the like.

Fig. 3 shows a scanning electron micrograph of a layer 30 of microreplicated adhesive prepared from liner 20 seen in Fig. 1.

The adhesive layer 30 has a surface 32 having a topography essentially replicating the inverse of the topography of surface 22 caused by patterns 24 and 26. As explained above how the transfer of topography from tooling to liner to adhesive proceeds, Figs. 1 and 3 provide photographic proof of the essential replication of topography during transfer. The topography of liner 20 therefore can determine the resulting topography of surface 32 of adhesive layer 30 that fill the recess(es) of microembossed liner 20.

Surface 32 has topographical features of a series of interconnected microchannels 37 essentially matching ridges 28 and an array of optional pegs 39 essentially matching depressions 29. The duration of microchannels and pegs depend on the chemistry of the adhesive chosen and the conditions of application.

Layer 30 can be coated in any thickness that is greater than the height of ridges 28 of liner 20. Desirably, the thickness can be at least about 5  $\mu\text{m}$ .

Preferably, for image graphic applications on vertical supporting substrates, the thickness can range from at least about 20  $\mu\text{m}$  to about 50  $\mu\text{m}$ .

Adhesives can be selected from a variety of conventional adhesive formulations to achieve the topography of surface 32.

5 Nonlimiting examples of adhesives include pressure sensitive adhesives, hot melt or heat activated adhesives that are pressure sensitive at the time of application such as pressure sensitive adhesives disclosed in U.S. Pat. No. 4,994,322 (Delgado et al.); U.S. Pat. No. 4,968,562 (Delgado); EPO Publication 0 570 515; EPO Publication 0 617 708; pressure sensitive adhesives disclosed in  
10 U.S. Patent Nos. 5,296,277 and 5,362,516 (both Wilson et al.) and 5,141,790 (Calhoun et al.) and PCT Patent Application Serial No. WO US96/1687 (Keller et al.), and any other type of pressure sensitive adhesive disclosed in Satas, et al., Handbook of Pressure Sensitive Adhesives, 2nd Ed. (Von Nostrand Reinhold, N.Y., 1989).

15 Chemistry and polymer physics of the adhesive can be used to control the fourth dimension, duration, of three-dimensional microreplicated adhesives of the invention. Understanding the rheology, such as creep compliance, of an adhesive can assist in controlling how quickly or if the microchannels 37 close after application.

20 Layer 30 of adhesive can cover all or a part of surface 22 of liner 20. The remaining portions of surface can be covered by other adhesive formulation(s) or left exposed for a pattern of microreplicated adhesive on a film. Pattern coating of adhesives can be found in PCT Patent Publication WO96/15715 (Yasis et al.).

For example, if one desired to have differential rheological  
25 properties on a given film, one could pattern coat adhesive layers, such as concentrically, in order to control how quickly certain portions of the microchannels 37 close. In the tributary-river paradigm, the adhesive layer pattern coated at the relative interior of the surface 32 could flow more quickly and close off microchannels to fluid ingress while microchannels of the relative perimeter of  
30 the surface 32 permit continued "drainage" of fluids from the interior of adhesive interface toward the perimeter.



Other materials besides adhesives can be used to fill one of the multiple embossed patterns if adhesive is used to fill other(s) of the multiple embossed patterns. For example, non-adhesive protrusions can be formed in, or different adhesive formulations can be filled into, depressions 29. Because pattern 5 26 is embossed before pattern 24 is embossed, the non-adhesive material or different adhesive formulation is added to depressions 29 after the embossing of pattern 26 and before the embossing of pattern 24. Then, layer 30 is coated over surface 22, resulting in a layer 30 of adhesive having non-adhesive protrusions 39 thereon.

10 Non-adhesive protrusions can be constructed from any material that can utilize the topographical features of the liner 20 and is compatible in performance with the adhesive and the desired adhesive use. Nonlimiting examples of non-adhesive materials include those materials disclosed in the Calhoun et al. and Wilson et al. patents. The purpose of using such protrusions 15 39 can also be found in these patents.

Liner 20 can be any release or transfer liner known to those skilled in the art for use with adhesives and that is capable of being microembossed. Nonlimiting examples of liners include a variety of commercial materials from 3M of St. Paul, Minnesota and other commercial manufacturers of liner products such 20 as Rexam Release Corporation of Oakbrook, Illinois or Daubert Coated Products of Westchester, Illinois. Such liners are typically polyethylene coated papers with commercial silicone release coatings; polyethylene coated poly(ethylene terephthalate) films with commercial silicone release coatings; or cast polypropylene films which can be embossed with pattern(s) while making such 25 films, and thereafter coated with commercial silicone release coatings. Additional useful liners are identified in the Calhoun et al. and Wilson et al. patents.

Any film can be contacted to the major surface of adhesive opposite the major surface(s) of adhesive created by the topography of liner 20. Because the film is laminated to adhesive after the topography of adhesive 30 is microreplicated from liner pattern 24, and optionally, pattern 26, the appearance of an exposed major surface is not adversely affected by the topography of the

microreplicated adhesive during use. With that advantage, film can be imaged using any commercial technique, including electrography, inkjet, screen printing, flexography, electronic cutting, or other imaging or graphic techniques.

Alternatively, both major surfaces of adhesive layer 30 can be  
5 microreplicated using the same or different liner(s) 20 to provide the same or different adhesive performance properties at the two different adhesive interfaces during use.

For example, different types of fluid egress can be desired from the different adhesive interfaces: namely, gaseous egress at one interface and liquidic  
10 egress at the other.

Another example is the formation of adhesive topography at the interface between the film and adhesive in order to specifically create a pattern in the film using the adhesive topography to achieve that pattern.

Yet another possible embodiment is the use of same or different  
15 adhesives having same or different topographies where two or more adhesives are laminated together before adhesion to the film and supporting substrate. With the chemistry of the different adhesives determined, one can provide through-channels in the X-Y dimensions of the adhesive-adhesive interface without affecting the adhesive bond strength of the adhesive laminate to the film or the supporting  
20 substrate.

Nonlimiting examples of films useful for contact with adhesive surfaces of the present invention include Controltac™ branded films commercially available from 3M, films disclosed in PCT Patent Application Serial No. WO US96/19683, foils, metallic plates, ceramic plates, polymeric sheets, vibration  
25 damping materials, reflective sheeting, retroreflective sheeting, top-coated materials, industrial tape backings, hypoallergenic tape backings, and combinations thereof.

#### Usefulness of the Invention

30 Image graphic films are unexpectedly improved by the microreplicated adhesive surfaces of the present invention. Image graphic films

having adhesive surfaces of the present invention can be used to ensure fluid egress for a predetermined period of time according to the rheology of the adhesives (creep compliance, modulus, etc.).

For example, one skilled in the art can control fluid egress but

and (b) forming a topography according to the present invention, and (c) appropriately applying the adhesive to the supporting substrate. This provides air bleed during installation but afterwards seals the interface between the adhesive and the supporting substrate.

10                   Alternatively, one skilled in the art can select an adhesive having a different rheology to maintain the topography of the adhesive surface for a longer period of time after initial installation to permit multiple reinstallations onto the

5                   minimize fluid ingress at the adhesive interface by (a) selecting a suitable adhesive

15                   One can make image graphic films with two different types of adhesives in the differing depths of patterns on liner 20 for ease of installation of an image graphic film. This construction is an alternative to products described in the Calhoun and Wilson patents identified above but can function in similar manners.

20                   Adhesive surfaces of the present invention improve economic value by reducing manufacturing costs, reducing labor costs during installation, and same or different supporting substrate or to maximize available routes for fluid egress.

temperature applications, where incomplete bonding of an adhesive to a substrate  
25                   at the lower temperature is a problem because the adhesive is slow to "wet" the substrate surface. Over time, the extent of the adhesive contact can change, possibly entrapping air. Without microchannels provided by microreplicated adhesive surfaces of the present invention, the fluid can not egress.

Wavefront motion is usually used to apply murals or graphics to a  
30                   supporting substrate. These graphics benefit from the adhesive topography of the minimizing maintenance required by adhesive interface problems.

Adhesive surfaces of the present invention can tolerate lower

promote fluid egress during adhesive application of the graphic to the substrate but also survive the application process that involves high transient pressures to provide routes of fluid egress for residual air pockets.

Further features, advantages, and embodiments are described in the

### Examples

#### **Sample Analyses:**

Liner and adhesive samples were evaluated using a JSM-6400 (JEOL, Tokyo, Japan) scanning electron microscopy, light microscopy with a JENA JENAVERT (Jena, Germany) incident light microscope or Bausch and Lomb stereo microscope (Bausch & Lomb, Rochester, NY), or interferometry microscopy using a WYKO  
examples.  
liner evaluations.

#### **Tests:**

Peel Test: Adhesion tests were a modification of ASTM method D3330 (1992) and Pressure Sensitive Tape Council method PSTC-1 (1989). Caustic etched and acid desmut aluminum test panels (6061 T6, Q-Panel Co., Phoenix Arizona) and painted aluminum test panels (Fruehauf, Indianapolis, IN) were cleaned with KSI surface primer (WYKO Corp., Tucson, AZ). A Surtronic 3P stylus profilometer (Rankd Taylor-Hobson, Inc., Leicester, U.K.) was also used for some removed, and the strips were applied to the panels using either a PA-1 Hand Applicator (available from Minnesota Mining and Manufacturing Company (3M) St. Paul, MN) at a speed of about 2.5 centimeter/second or a Vanquisher roll laminator (Stoughton Machine and Manufacturing Co., Inc., Stoughton Wisconsin) at 40 psi gauge pressure and a speed of about 2.5 cm/second. A backing strip of 2.54 centimeter wide 3M Scotchcal™ Film Series 3650 adhesive film was laminated in registration onto each sample strip. The backing film prevented the DuPont "PrepSol" and allowed to dry. Samples of pressure sensitive adhesive and film on liner were cut into 2.54 centimeter wide strips. The release liner was

peel back testing. After 24 hours in a constant temperature and humidity room at 22°C and 50% relative humidity or after 7 days at 66°C followed by 24 hour equilibration in the constant temperature and humidity room, peel adhesion was measured as a 180 degree peel back at a crosshead speed of 30.5 centimeters per minute (ASTM D 1002).

Creep Compliance Testing: A sandwich of pressure sensitive adhesive layer (about 125 microns thick) between two sheets of 48 micron thick poly(ethylene terephthalate) film was prepared by coating the pressure sensitive adhesive onto one sheet of the polyester film, drying at 66°C to constant weight (at least about 20 minutes) to afford about ½ the test specimen thickness, and doubling over the film. The thickness of the adhesive layer was determined by measuring the thickness of the sandwich with a Lloyd 500 tensile tester (Lloyd Instruments, Segensworth Fareham England), a vernier caliper gauge and subtracting the thickness of the polyester films. Two test pieces of equal size were die-cut and placed in the parallel plate creep compliance rheometer, one piece being on each side of the center plate, with an outer plate contacting the exposed surface of each. One end of the center plate was connected to a linear variable transducer, which measures the plate displacement (due to material flow) and outputs an electrical signal proportional to the displacement, to a recorder. The parallel plates were placed in horizontal arrangement and the two coated construction. The test pieces were cut from this sandwich, and the average thickness ( $h$ ) of the pressure sensitive adhesive layer was determined using a micrometer. A hook was attached to one end of the center plate and the other end of the center plate was attached to the opposite end of the center plate with a flexible wire extending horizontally from the hook and then downward over a pulley, the outer plates being held in a fixed position. A suitable weight (sufficient to measurably deform the sample a distance no greater than its thickness) was attached to the free end of the wire, then the recorder was started. For these examples, the weight used to exert the stress ( $f$ ) was 500 g. From the recorder, the time ( $t$ ) and the displacement ( $X$ , i.e., strain) were read. The creep compliance at a given temperature was then calculated according to the equation:  $C = X/f$ . The outer plates were then clamped firmly so as to compress the interposed layers approximately 10%. A hook was attached to the opposite end of the center plate.

where  $t$  is the time at which the measurement is taken,  $A$  is the area of one face of the pressure sensitive adhesive samples,  $h$  is the thickness of the adhesive mass,  $X$  is the displacement at time  $t$  (where  $X$  is less than  $h$ ) and  $f$  is the force due to the mass attached to the wire connected to the middle plate. Where  $A$  is expressed in

cm<sup>2</sup>/dyne. As an example, a creep compliance  $J$  value calculated at a time of 3 minutes is indicated here as  $J(3min.)$ . The weight may be removed after time  $t$  allowing the pressure sensitive adhesive to relax or recover. After some additional time  $t_{relax}$ , the compliance may be determined again. As an example, if a weight is applied for 3 minutes and then removed, and the compliance determined after an additional 3 minutes, the relaxed  $J$  value is indicated here as  $J(3 min. + 3 min. relax)$ . A percent recovery under the test conditions may also be calculated: %

- 5 cm<sup>2</sup>,  $h$  in cm,  $X$  in cm, and  $f$  in dynes, then the compliance value  $J(t)$  is given in
- 15 Slide Test for Positionability: A horizontal glass plate was heated to 40-43°C and cleaned with methyl ethyl ketone (MEK). A test sample (i.e., pressure sensitive adhesive on the indicated backing), approximately 2.5 cm by 7.5 cm, was draped flat onto the glass plate with the pressure sensitive adhesive side down for approximately 10 seconds. The end edge of the sample was lifted and pulled
- 20 laterally. The test ratings are as follows:

1 sample slid freely  
 recovery = 100%  $\times [J(t) - J(t + t_{relax})] / J(t)$ .

- 25 4 sample stuck to the plate and could not be repositioned without damage

Hot Application/Reapplication Test: A horizontal glass plate was heated to 40-43°C and cleaned with methyl ethyl ketone (MEK). A test sample, approximately 2.5 cm by 7.5 cm, was draped flat onto the glass plate with the pressure sensitive

30 2 sample slid easily with some resistance  
 3 sample slid with considerable resistance because of adhesion

a finger with approximately 500 g "force" to uniformly contact the periphery (from the edge to about 0.5 cm inward) to the glass plate. The sample was then pressed by a finger around the periphery and toward the center of the sample to prevent the PSA from debonding and prevent the entire air pocket from moving to the edge of

absence of trapped bubbles. The strip was slowly peeled off of the stage and reapplied in the same procedure. A third reapplication was also done. The test ratings are as follows:

10 "poor" sample showed trapped bubbles after the first application (indicating no detectable air release properties)

"fair" sample did not show bubbles after the first application, but did show bubbles after either the second or third reapplication

5 the sample. The sample applied in this fashion was then evaluated for presence or  
15 application and showing retention of air release properties for the subsequent reapplications). Also, the microchannels in the pressure sensitive adhesive layer of samples rated "good" were still present after the first and second removal steps.

20 Cold Application Test: Test samples were premasked with SCPM-3 (3M) premask tape. Sample strips approximately 5 cm by 23 cm were cut from the premasked "good" no bubbles were observed on any of the three application and

reapplications (showing air release properties for the first  
the test temperature for at least 20 minutes. The sample strips were applied to the test panels using one pass of a PA-1 Hand Applicator maintained at a constant 45  
25 degree angle during application and a speed of about 1.5 m/min. Constant application force was supplied by 2 kg, 4 kg, or 6 kg masses mounted on top of the squeegee. Immediately, the premask was removed from the applied strip at a 180 degree angle and a peel rate of approximately 1.5 m/min. The test panel with the applied films was then heated at 66°C for 5 minutes to develop any blistering. The  
30 film samples. The samples and Fruehauf painted test panels were conditioned at the test temperature for at least 20 minutes. The sample strips were applied to the

appearance of the sample parallels the rating. Particularly good are ratings of less than or equal to 5-6 with a mass of 2 kg, 3-4 at 4 kg, and 1-3 at 6 kg.

**Indent Panel Test:** A circular indent was made in 0.7 mm thick aluminum test

indent was about 2.8 cm diameter at the plane of the panel and was about 0.6 cm deep. A 7.5 cm by 7.5 cm test sample to be tested was centered over the indent and applied flat onto the panel and taut over the indent. A PA-1 Hand Applicator with a protective sleeve (SA-1, available from 3M) was used to press the sample onto the panel using a mass of about 1 kg. Then the film was pressed with a thumb into the depressed indent. At least 3 kg of mass was applied. The ability of the sample to conform into the indent and uniformly contact the depressed panel indent was

- 5 panel using a hemispherical drop hammer with a tip diameter of 2.5 cm. The
- 15           0       sample would not conform significantly into the indent against the entrapped air
- 1       sample could be pressed down into the indent to the extent of about 50%
- 2       sample could be pressed down to conform with much of the indent
- 20           3       sample could be pressed down to conform slowly (greater than 5
- 4       sample could be pressed down to conform quickly (less than 5
- 5       sample could be pressed down to conform very quickly (less than 1
- 6       sample could be pressed down to conform almost instantly (less than 0.5
- 7       sample could be pressed down to conform immediately (less than 0.1
- 8       sample could be pressed down to conform almost instantly (less than 0.05
- 9       sample could be pressed down to conform almost instantly (less than 0.01
- 10       sample could be pressed down to conform almost instantly (less than 0.005
- 11       sample could be pressed down to conform almost instantly (less than 0.001
- 12       sample could be pressed down to conform almost instantly (less than 0.0005
- 13       sample could be pressed down to conform almost instantly (less than 0.0001
- 14       sample could be pressed down to conform almost instantly (less than 0.00005
- 15       sample could be pressed down to conform almost instantly (less than 0.00001
- 16       sample could be pressed down to conform almost instantly (less than 0.000005
- 17       sample could be pressed down to conform almost instantly (less than 0.000001
- 18       sample could be pressed down to conform almost instantly (less than 0.0000005
- 19       sample could be pressed down to conform almost instantly (less than 0.0000001
- 20       sample could be pressed down to conform almost instantly (less than 0.00000005
- 21       sample could be pressed down to conform almost instantly (less than 0.00000001
- 22       sample could be pressed down to conform almost instantly (less than 0.000000005
- 23       sample could be pressed down to conform almost instantly (less than 0.000000001
- 24       sample could be pressed down to conform almost instantly (less than 0.0000000005
- 25       sample could be pressed down to conform almost instantly (less than 0.0000000001
- 26       sample could be pressed down to conform almost instantly (less than 0.00000000005
- 27       sample could be pressed down to conform almost instantly (less than 0.00000000001
- 28       sample could be pressed down to conform almost instantly (less than 0.000000000005
- 29       sample could be pressed down to conform almost instantly (less than 0.000000000001
- 30       sample could be pressed down to conform almost instantly (less than 0.0000000000005
- 31       sample could be pressed down to conform almost instantly (less than 0.0000000000001
- 32       sample could be pressed down to conform almost instantly (less than 0.00000000000005
- 33       sample could be pressed down to conform almost instantly (less than 0.00000000000001
- 34       sample could be pressed down to conform almost instantly (less than 0.000000000000005
- 35       sample could be pressed down to conform almost instantly (less than 0.000000000000001
- 36       sample could be pressed down to conform almost instantly (less than 0.0000000000000005
- 37       sample could be pressed down to conform almost instantly (less than 0.0000000000000001
- 38       sample could be pressed down to conform almost instantly (less than 0.00000000000000005
- 39       sample could be pressed down to conform almost instantly (less than 0.00000000000000001
- 40       sample could be pressed down to conform almost instantly (less than 0.000000000000000005
- 41       sample could be pressed down to conform almost instantly (less than 0.000000000000000001
- 42       sample could be pressed down to conform almost instantly (less than 0.0000000000000000005
- 43       sample could be pressed down to conform almost instantly (less than 0.0000000000000000001
- 44       sample could be pressed down to conform almost instantly (less than 0.00000000000000000005
- 45       sample could be pressed down to conform almost instantly (less than 0.00000000000000000001
- 46       sample could be pressed down to conform almost instantly (less than 0.000000000000000000005
- 47       sample could be pressed down to conform almost instantly (less than 0.000000000000000000001
- 48       sample could be pressed down to conform almost instantly (less than 0.0000000000000000000005
- 49       sample could be pressed down to conform almost instantly (less than 0.0000000000000000000001
- 50       sample could be pressed down to conform almost instantly (less than 0.00000000000000000000005
- 51       sample could be pressed down to conform almost instantly (less than 0.00000000000000000000001
- 52       sample could be pressed down to conform almost instantly (less than 0.000000000000000000000005
- 53       sample could be pressed down to conform almost instantly (less than 0.000000000000000000000001
- 54       sample could be pressed down to conform almost instantly (less than 0.0000000000000000000000005
- 55       sample could be pressed down to conform almost instantly (less than 0.0000000000000000000000001
- 56       sample could be pressed down to conform almost instantly (less than 0.00000000000000000000000005
- 57       sample could be pressed down to conform almost instantly (less than 0.00000000000000000000000001
- 58       sample could be pressed down to conform almost instantly (less than 0.000000000000000000000000005
- 59       sample could be pressed down to conform almost instantly (less than 0.000000000000000000000000001
- 60       sample could be pressed down to conform almost instantly (less than 0.0000000000000000000000000005
- 61       sample could be pressed down to conform almost instantly (less than 0.0000000000000000000000000001
- 62       sample could be pressed down to conform almost instantly (less than 0.00000000000000000000000000005
- 63       sample could be pressed down to conform almost instantly (less than 0.00000000000000000000000000001
- 64       sample could be pressed down to conform almost instantly (less than 0.000000000000000000000000000005
- 65       sample could be pressed down to conform almost instantly (less than 0.000000000000000000000000000001
- 66       sample could be pressed down to conform almost instantly (less than 0.0000000000000000000000000000005
- 67       sample could be pressed down to conform almost instantly (less than 0.0000000000000000000000000000001
- 68       sample could be pressed down to conform almost instantly (less than 0.00000000000000000000000000000005
- 69       sample could be pressed down to conform almost instantly (less than 0.00000000000000000000000000000001
- 70       sample could be pressed down to conform almost instantly (less than 0.000000000000000000000000000000005
- 71       sample could be pressed down to conform almost instantly (less than 0.000000000000000000000000000000001
- 72       sample could be pressed down to conform almost instantly (less than 0.0000000000000000000000000000000005
- 73       sample could be pressed down to conform almost instantly (less than 0.0000000000000000000000000000000001
- 74       sample could be pressed down to conform almost instantly (less than 0.00000000000000000000000000000000005
- 75       sample could be pressed down to conform almost instantly (less than 0.00000000000000000000000000000000001
- 76       sample could be pressed down to conform almost instantly (less than 0.000000000000000000000000000000000005
- 77       sample could be pressed down to conform almost instantly (less than 0.000000000000000000000000000000000001
- 78       sample could be pressed down to conform almost instantly (less than 0.0000000000000000000000000000000000005
- 79       sample could be pressed down to conform almost instantly (less than 0.0000000000000000000000000000000000001
- 80       sample could be pressed down to conform almost instantly (less than 0.00000000000000000000000000000000000005
- 81       sample could be pressed down to conform almost instantly (less than 0.00000000000000000000000000000000000001
- 82       sample could be pressed down to conform almost instantly (less than 0.000000000000000000000000000000000000005
- 83       sample could be pressed down to conform almost instantly (less than 0.000000000000000000000000000000000000001
- 84       sample could be pressed down to conform almost instantly (less than 0.0000000000000000000000000000000000000005
- 85       sample could be pressed down to conform almost instantly (less than 0.0000000000000000000000000000000000000001
- 86       sample could be pressed down to conform almost instantly (less than 0.005
- 87       sample could be pressed down to conform almost instantly (less than 0.001
- 88       sample could be pressed down to conform almost instantly (less than 0.0005
- 89       sample could be pressed down to conform almost instantly (less than 0.0001
- 90       sample could be pressed down to conform almost instantly (less than 0.005
- 91       sample could be pressed down to conform almost instantly (less than 0.001
- 92       sample could be pressed down to conform almost instantly (less than 0.0005
- 93       sample could be pressed down to conform almost instantly (less than 0.0001
- 94       sample could be pressed down to conform almost instantly (less than 0.005
- 95       sample could be pressed down to conform almost instantly (less than 0.001
- 96       sample could be pressed down to conform almost instantly (less than 0.0005
- 97       sample could be pressed down to conform almost instantly (less than 0.0001
- 98       sample could be pressed down to conform almost instantly (less than 0.005
- 99       sample could be pressed down to conform almost instantly (less than 0.001
- 100       sample could be pressed down to conform almost instantly (less than 0.0005

25

**Rivet Panel Test:** A test sample was manually pressed over a 12 mm diameter by 2.5 mm high rounded rivet onto a Fruehauf flat panel with rivets by starting at the edges of the sample 3.8 cm from the center of the rivet. The sample was pressed down, using both thumbs, with thumb pressure (approximately 750 g for each

seconds) and completely into the indent



rivet keeping thumbs at opposite sides of the rivet and making half-circular motions in alternating directions with decreasing radii to keep the thumbs along the margin of the pocket (approximately 750 g for each thumb). The force was limited so as not to burst the film. This procedure ensured that a large air pocket was

the sample edge by debonding of the pressure sensitive adhesive. The time required for dissipating the air pocket and conforming the film to within 2 mm of the rivet was determined. If a large air pocket remained after 5 minutes of working the film, the diameter of the air pocket was determined. Samples with best air  
10 dissipation generally required less than about 30 to 60 seconds to conform the film up to the rivet. Poorest samples entrapped about a 35 mm (or larger) air pockets after 5 minutes of working application.

5 formed under the sample and was prevented from being pushed under the film, to  
15 of a rubber roller (specifications as indicated in the specific examples) onto an acrylic panel. The sample was centered over a 6.4 mm diameter hole in the panel. With the sample side up, the panel was sealed onto a gasket by clamping to center the hole over a recessed chamber in an air delivery stage. After 5 mins., the stage was connected to an air-line (45 cm<sup>3</sup> total volume) and initially pressurized to 50  
20 inches (127 cm) of water as determined by a pressure gauge connected to the system. The system was closed by a valve, and the time for the pressure to fall to

Air Bleed Test: A circular test sample 4.4 cm diameter was applied with 4 passes  
~~representative of films with pressure sensitive adhesive layers having no~~  
microchannels, showed no air bleed even after several days. For lower adhesion  
25 pressure sensitive adhesives, the initial pressure must be adjusted such that the sample does not appreciably debond from the panel.

Rivet/Corrugated Panel Test: A sample was applied by hand onto a 10 cm by 30.5 cm painted aluminum Fruehauf corrugated panel having four 12 mm diameter by  
20 ~~representative of films with pressure sensitive adhesive layers having no~~  
25 inches (63.5 cm) of water was determined. Poorest samples, such as

portion of the panel. The degree of ease of pressing the sample into the valleys and conformably onto the rivets to prevent air entrapment was evaluated.

### Examples:

An acrylic pressure sensitive adhesive solution (described as Adhesive Solution 1 in US Patent 5,296,277 and modified with 18.5 phr of a resin -- Nirez™ 2019 from Arizona Chemical Co.) was prepared. The average 21°C, 3 minute creep compliance,  $J(3 \text{ min.})$ , of the pressure sensitive adhesive prepared from this solution was 0.53 sq. cm./dyne and the 21°C, relaxed creep compliance,  $J(3 \text{ min.} + 3 \text{ min. relax})$ , was 0.08 sq. cm./dyne.

## 5 Pressure Sensitive Adhesive Solution 1

15 acetate and heptane at a solids content of about 28%. The average 21°C, 3 minute creep compliance,  $J_{(3 \text{ min.})}$ , of the pressure sensitive adhesive prepared from this solution was 1.64 sq. cm./dyne and the 21°C, relaxed creep compliance,  $J_{(3 \text{ min.} + 3 \text{ min. relax})}$ , was 0.52 sq. cm./dyne.

## 20 Pressure Sensitive Adhesive Solution 3

**An acrylic pressure sensitive adhesive solution (described as Adhesive Solution 2  
Pressure Sensitive Adhesive Solution 2**

Isooctyl acrylate-acrylic acid (98:2) copolymer was prepared as a solution in ethyl prepared at a solids content of about 25%.

25 Pressure Sensitive Adhesive Solution 4

Kraton 1107 resin (20 parts and available from Shell Chemical Company, Westbrook, IL), Escorez 1310LC (20 parts), and toluene (60 parts) were combined. The average 21°C, 3 minute creep compliance,  $J(3 \text{ min.})$ , of the pressure sensitive adhesive (containing 1 part of the crosslinker solution) was

#### Pressure Sensitive Adhesive Solution 5

A latex acrylic pressure sensitive adhesive (described in Example 1 of US 4,629,663) was prepared at about 54% solids.

#### Pressure Sensitive Adhesive Solution 6

A latex pressure sensitive adhesive (prepared according to the procedures of US Patent 5,196,246 and containing about 72% by dry weight of the acrylic pressure sensitive adhesive component) was prepared. The average 21°C, 3 minute creep compliance,  $J(3 \text{ min.})$ , of the pressure sensitive adhesive prepared from this solution was 0.63 sq. cm./dyne and the 21°C, relaxed creep compliance,  $J(3 \text{ min.} + 3 \text{ min. relax})$ , was 0.08 sq. cm./dyne.

5

15 A pressure sensitive adhesive similar to pressure sensitive adhesive 1, but without added crosslinker, was isolated from solution as 100% solids resin for hot melt coating.

#### Pressure Sensitive Adhesive Solution 8

20 A pressure sensitive adhesive solution (Adhesive Solution 2 of US Patent 5,296,277 modified such that the alkyl acrylate component was 2-methylbutyl

#### Pressure Sensitive Adhesive Resin 7

content of about 55-60%.

25

#### Pressure Sensitive Adhesive Solution 9

Pressure sensitive adhesive solution 1 (100 phr) was modified by adding 5 phr of Pycal 94 (available from ICI Americas, Wilmington, DE).

30

#### Pressure Sensitive Adhesive Solution 10

acrylate and 1.8 parts of crosslinker solution was added) was prepared at a solids content of about 25-40%.

Isooctyl acrylate-acrylic acid (94:6) copolymer was prepared as a solution in ethyl acetate and heptane at a solids content of about 45%. To 100 parts of the solution was blended 20 parts of Foral 85 (available from Hercules, Inc., Wilmington, DE), 7.5 parts of Herculyn-D (available from Hercules, Inc.), and 7.5 parts of Pycal 94 1.5 parts of a solution of 5% crosslinker (described in US Patent 5,296,277) in toluene.

10    Examples 1-4.

A release liner consisting of four layers with the core being 97 microns poly(ethylene terephthalate), 21-22 microns polyethylene with a matte finish on a  
5    (available from ICI Americas). To 100 parts of the combined solution was added  
15    glossy side by passing the release liner between an 85 durometer, 15 cm diameter silicone rubber roll and a 15 cm diameter engraved metal roll. The engraved pattern on the metal roll was intersecting recessed lines (microgrooves) forming a square grid with the microgrooves at a 45 degree angle to the circumference of the roll. The nominal metal roll groove dimensions are listed in the table below. The  
20    silicone rubber roll and the engraved roll were heated by circulating oil through the rolls. The set temperatures for the oil heater are indicated in the table below. The back side layer, and 21-22 microns polyethylene with a glossy finish on the front side with a silicone release coating on the glossy side, was microembossed on the  
25    formed a pattern of continuous raised intersecting microridges (and essentially flat land areas between the raised ridges) on the glossy silicone-coated side of the release liner. The intersections were also raised. The ridges had a curved top and filleted junction with the base. Average ridge dimensions are listed in the table below. The ridges were spaced the same as the engraved pattern. A similar liner microembossed as described above was analyzed with time-of-flight secondary ion  
30    mass spectrometer (TOF SIMS) using a pulsed 25 keV  $\text{Ga}^+$  primary ion beam with rolls were forced together with about 22 N/mm nip force by air cylinders. The release liner was passed through this arrangement at about 1.6 cm/sec. This

uniform silicone distribution was shown over the liner both on and off the microembossed ridge areas.

Pressure Sensitive Adhesive Solution 1 was coated onto each microembossed

microns thick. A control sample was prepared using a similar liner that had not been microembossed with ridges. The exposed adhesive side of these were laminated at room temperature to a 46 micron thick plasticized, white flexible and conformable vinyl (PVC) film identical to that used in 3M™ Controltac™ Plus

10 Graphic Marking Film Series 180-10. The lamination used a Vanquisher roll laminator (Stoughton Machine and Manufacturing Co., Inc., Stoughton Wisconsin) at 200 kPa (30 psi) gauge pressure and a speed of about 2.5 cm/second to afford an

5 release liner and dried at 66°C for 10 minutes to form an adhesive film about 32

15 intersections (corresponding to the microridges of the removed release liner) The average channel dimensions are listed in the table below. The results showed that the channels allowed air bubbles and large air pockets to be easily pressed out by hand during or after application of the film on a surface. Thus, the films could be applied much faster than the control film while retaining uniform appearance of the

20 applied graphic film. The samples adhered well to the substrates and showed no signs of undesired edge lifting. The control sample with no microchannels essentially flat construction. After removal of the release liner the exposed pressure sensitive adhesive surface had continuous recessed microchannels and graphic resulted. Trapped air bubbles under the applied control film could not be pressed out.

required more careful application, otherwise air bubbles and an uneven appearing graphic resulted. Trapped air bubbles under the applied control film could not be

Table 1. Data for Examples 1-4

	Example 1	Example 2	Example 3	Example 4
Engraved Roll Groove Nominal	75	75	75	0
Depth (microns)				
Engraved Roll Groove Spacing (mm)	2.5	0.77	0.77	0
Engraved Roll Set Temp. (°C)	110	104	110	no emboss
Silicone Roll Set Temp. (°C)	121	113	121	no emboss
Liner Ridge Width (microns)	220	190	225	0
Liner Ridge Height (microns)	28	30	25	0
PSA Channel Width (microns)	195-240	150-190	200-220	0
PSA Channel Depth (microns)	23-30	23-25	15-19	0
Width (microns)				
Engraved Roll Groove Nominal	50	25	25	0
Rivet Panel Test Results	30 seconds	10 seconds	10 seconds	39 mm after 5 min.

Example 5.

A liner was microembossed according to the general procedure of Examples 1-3 to

- 5 afford an array of ridges similar to Examples 1-3, but having ridge dimensions of about 165 microns wide, 25-30 microns high, and ridge spacing of 2.5 mm (from a Slide Test Rating

	4 (poor)	4 (poor)	4 (poor)	4 (poor)
Hot Application Test Rating	"good"	"good"	"good"	"poor"

and 50 microns deep, groove spacing of 2.5 mm. The set point temperatures of the oil heaters were 113°C for the silicone roll and 107°C for the engraved roll.

- 10 The rolls were forced together with about 22 N/mm nip force by air cylinders. The release liner was passed through this arrangement at about 1.6 cm/sec. Pressure Sensitive Adhesive Solution 7 was hot melt coated at a temperature of 218°C onto the liner to afford about a nominally 35 micron thick pressure sensitive adhesive layer. Analyses showed that the hot extruded pressure sensitive adhesive had filled 15 cm diameter engraved roll with nominal groove dimensions of 75 microns wide

the exposed pressure sensitive adhesive layer on the liner. The film construction had a Hot Application Test rating of "good" and an Indent Panel Test rating of 4 (excellent).

About a 08 g/m<sup>2</sup> basis weight polypropylene film was cast-microembossed onto a chilled grooved metal roll to afford two intersecting sets of parallel ridges forming essentially flat square or diamond shaped planar regions between the ridges. The microembossed surface was silicone coated to provide release. Pressure Sensitive Adhesive Solution 5 was coated onto the ridged release liner and dried at 66°C to afford at about a 64 micron thick layer of pressure sensitive adhesive. After lamination of the indicated conformable film, the pressure sensitive films was

5 Examples 6-8.

15 be pressed out during or after the graphic film was applied. Samples were applied to glass plates, and after several days at room temperature, the pressure sensitive adhesive layers did not fully contact the glass in the recessed channel areas (i.e., the channels remained open). Samples showed air bleed properties when removed from the substrate and reapplied.

20

evaluated by the Air Bleed Test. The results, summarized in the table below, demonstrated the desired property of air bleed to allow small and large bubbles to

Table 2. Data for Examples 6-8

	Conformable Film	Liner Ridge/PSA	Nominal Liner Ridge	PSA Channel Width	Surface Appearance	Rivet Panel Test	Air Bleed Test
		(mm)					
Example 6	178 micron Teslin (from PPG)	1.27	50	0.4 mm	Fair	15-20 sec.	17 sec. (175g, 5 cm roller) 43 sec. (2.4 kg, 4.5 cm roller)
Example 7	46 micron plasticized PVC	2.54 Channel Spacing	50 Height (microns)	0.3 mm	Poor	15	6 sec. (175g, 5 cm roller)
Example 8	46 micron plasticized PVC	2.54	13	0.3 mm	Acceptable	-	30 sec. (2.4 kg, 4.5 cm roller)

## Examples 9-33.

A release liner as described in Examples 1-4 was microembossed with small pits on the glossy silicone-coated side and the pits filled with fine glass beads

according to the procedure described in U.S. Pat. No. 5,362,516. The pits were

7	plasticized					sec.	5 cm roller)
	PVC						

micron spacing. A second emboss pattern was imposed upon the release liner by

passing the release liner between an 85 durometer silicone rubber roll and an

engraved metal roll. The engraved pattern was recessed lines (microgrooves) with

dimensions about 80 microns wide and 24 microns deep. The grooves were 1.3

mm apart and formed a square grid with grooves oriented 45 degrees to the

circumference of the roll. The set point temperatures of the oil heaters were

110°C for the silicone roll and 104°C for the engraved roll. The rolls were forced

about 70 microns diameter and 18-19 microns deep in a square lattice of 300



continuous intersecting ridges on the glossy silicone-coated side of the release liner. The ridge shapes were similar to the ridges described in Examples 1-3. Average dimensions of the ridges were about 85 microns wide, 18-19 microns high, and spaced the same as the engraved pattern. The intersections of the ridges

microembossed pattern and did not substantially change the first pattern, except where individual pits were raised to the top of a ridge or sheared at the side of a ridge (see Figs. 1 and 2). The liner was analyzed with time-of-flight secondary ion mass spectrometry (TOF-SIMS) as in Examples 1-4. A uniform silicone  
10 distribution was shown over the liner both on and off the microembossed ridge areas.

were 16-19 microns high on average. This pattern was superimposed on the first  
15 a continuous tacky aggressive pressure sensitive adhesive layer. The approximate thicknesses of the dried PSA layers were: 30 microns for PSA 1, 28 microns for PSA 2, 36 microns for PSA 4, and 23 microns for PSA 6. The exposed side of the adhesive film on the doubly microembossed release liner was laminated to essentially impermeable flexible films using a roll laminator as described in  
20 Examples 1-3. The films included 46 micron plasticized white PVC described in Examples 1-3, 100 micron thick plasticized white PVC, 48 micron thick  
the indicated pressure sensitive adhesive was coated onto the doubly microembossed release liner, which was then dried at 66 °C for 10 minutes to form  
degrees. The polyester and aluminum films did not have sufficient elongation to  
25 be evaluated with the Indent Panel Test. The pressure sensitive adhesives had average measured channel dimensions of about 80 microns wide and about 15-18 microns deep and a uniform array of 8-12 micron high protruding mounds of glass beads corresponding to the pits on the liner. Two types of controls were used for comparison: One type of control was prepared from a "pit-only liner" (i.e., the  
30 same liner material had only the filled pits of the first emboss, but no second-transparent poly(ethylene terephthalate), 100 micron thick polyethylene film, and innervious 15 micron thick aluminum foil. The films were conformable to various

microembossed ridges); the second control types were constructions of Examples 1-3 prepared from "ridge-only liners" having no first-emboss pits.

The resulting film/pressure sensitive adhesive laminates were evaluated with the

1 test, and Kiver Panel Test. The Peel Test was run on representative samples to indicate the range of adhesions (from moderate to high) exhibited with the pressure sensitive adhesives used. The samples removed after 7 days at 66°C were examined for presence or absence of the microchannels. The results (Table 3) show that the constructions made with the doubly microembossed liner are more easily positionable (as indicated by Slide Test ratings of 1-3) than control samples prepared from the "ridge-only liners" without protruding mounds of glass beads. Slide Test for positionability, Hot Application/Reapplication Test, Indent Panel properties for control samples prepared from the "pit-only liners."

The samples were also applied by finger pressure or by PA-1 Hand Applicator to flat substrates. Samples with the microchanneled pressure sensitive adhesive layer required no special application technique, were easily applied, and afforded evenly adhered graphic films with virtually no entrapped air bubbles. Any air pockets purposely formed by buckling the film were easily pressed out during application (Slide Test ratings of 4 - poor). The results also show the lateral (X-Y dimensions) air bleed properties of the microchanneled samples versus minimal air bleed sensitive adhesive debond in adjacent areas as the pocket moves). The results also show that air bleed was in a lateral (X-Y dimensions) direction and did not require z-axis air dissipation through the films or lifting of the graphic film from the substrate. All samples adhered well to the substrates and showed no signs of undesired edge lifting. In comparison, the control samples prepared from the "pit-only liner" required great care to prevent entrapment of many air bubbles. The trapped bubbles and pockets under the control samples prepared from the "pit-only or after application. Air pocket elimination did not require that the air pocket be pressed as a bulge in the film to the edge of the sample (i.e., requiring pressure

under the film, to the sample edge by debonding of the pressure sensitive adhesive. The latter process was done with difficulty for many of the pressure sensitive adhesives.

Test. Example 9 required 139 seconds while Control Example 10 showed no significant pressure drop after  $5.26 \times 10^5$  seconds (greater than 6 days).

10 A 7.5 cm by 7.5 cm square sample of Example 14 was subjected to the Hot Application/Reapplication Test. The applied sample was peeled off of the stage and subjected to 7 repeat applications, and each time an excellent uniform application was observed with no trapped bubbles. The pressure sensitive adhesive

5 Samples of Example 9 and Control Example 10 were subjected to the Air Bleed

15 The surface profile of the film side of the laminate construction of Example 9 (using a liner with microridges of about 18-19 microns high) showed no evidence of the emboss pattern telegraphing through the thin conformable vinyl film when compared to the surface profile of Example 10 (first type of control with no  
20 microridges in the liner). The surface topography of the film side of both constructions varied by about 2 microns from the lowest to highest points. backed film of Example 27 was similarly subjected to 30 repeat applications with similar excellent results.

es 9-33 Table 3. Data for Example

E:	PPSA solution  24 hr CTH	Film (gauge in μm)	Liner with Second Emboss Ridges	Panel Test, Painted Panel			Slide incl Test ults Rating	Hot plication/ pplication st Rating	Indent Panel Test Rating	Rivet Pa Test Res
				Ap) N/2.54 cm width Rea Te:	7 days 66°C	Channels on Peeled Sample?				
1	21	PVC (46)	Yes	29	Yes	1-2 c.	"good"	4		30 sec
1	1	"	No			1 after 1.	"poor"	0		37 mm 5 min
1	1	PVC (100)	Yes			3 c.	"good"	3		30 sec
1	1	"	No			2-3 after 1.	"poor"	0		42 mm 5 min
1	12	PET (46)	Yes	22	Yes	2 c.	"good"	-		45 sec
1	1	"	No			3 after 1.	"poor"	-		38 mm 5 min
1	1	polyolefin (100)	Yes			2 c.	"good"	1-3		35 sec
1	1	"	No			1-2 after n.	"poor"	0		39 mm 5 min

17	1	aluminum (15)	Yes	"		1	c.	good"	-	5-10 sec
18	12 2	PVC (46)	Yes	"	17	No	1-2	good"	1-2	15 sec
19	2	"	No	"			1-2	poor"	0	35 mm a 5 min.
20	2	PVC (100)	Yes	"			1-2	good"	3	35 sec
21	7 2	PET (48)	Yes	"	12	No	1-2	good"	-	25 sec
22	2	Polyolefin (100)	Yes	"			1-2	good"	2	15 sec
23	2	"	No	"			1	poor"	0	44 mm a 5 min.
24	23 4	PVC (46)	Yes	"	34	No	3	good"	3	10 sec
25	4	"	No	"			2	poor"	0	35 mm a 5 min.
26	4	PVC (100)	Yes	"			2	good"	3	11 sec
27	4.1 4	PET (48)	Yes	"	5.0	No	3	good"	-	18 sec
28	4	Polyolefin (100)	Yes	"			2	good"	3	13 sec
29	12 6	PVC (46)	Yes	"	13	Yes	2	good"	4	30 sec
30	6	"	No	"			1	poor"	0	38 mm a 5 min

3	6	PVC (100)	Yes	'			2	25 sec
3:	6 6	PET (48)	Yes	'	10	Yes	2 ec.	60-90 s
3:	6	olefin (100)	Yes	'			2	40 sec

**Examples 34-42.**

Film constructions were prepared according to the procedure of Example 9 using different engraved roll tooling groove dimensions or patterns and embossing conditions. The engraved groove pattern on the embossing rolls used for Examples

or interconnected hexagons in a "honeycomb" arrangement instead of squares.

Spacing for the latter was measured between parallel sides of the hexagons. The microembossed liner ridges had the same spacing as the engraved roll channels.

The coating and lamination process was the same as in Example 9 for Pressure

10 Sensitive Adhesive Solution 1 and Example 5 for Pressure Sensitive Adhesive Solution 7.

5 34-41 was a square grid oriented as in Example 9 and for Example 42 was a series

Tab Data for Examples 34-42

Ex. 36	Ex. 34	Ex. 35	Ex. 37	Ex. 38	Ex. 39	Ex. 40
PS. 1	1	7	1 7	1	1	1
square	square	square	square	square	square	square
Chr 1.3	2.5	2.5	0.8 1.3	1.3	1.3	0.8
P 130	150	120	105 140	80	105	130
P 20	20	18	19 10	15	7	20
3.5	1	3.5	3.5 2.5	2	2	4
good	"good"	"fair"	"good"good"	"good"	"good"	"good"
F	ation Test	ing				
Ind 3.5	3.5	3	3 4	4	4	3.5

1	Ex. 42
1	1
e	hexagon
	2.5
	500
	bimodal
	16
	1
1"	"good"
	4



#### Examples 43-49.

A release liner consisting of paper (about 114 microns), polyethylene (about 25 microns) with a matte finish on the back side, polyethylene (about 25 microns) with a glossv finish on the front side, and a silicone coating on the glossy side was

in US Patent 5,362,516. The pits were about 100 microns diameter, 22 microns deep in a square lattice of 300 micron spacing. The liners were then embossed according to the methods of Examples 1-3 except that the liner of Example 43 was not microembossed and had no continuous ridges. The liners of Examples 45, 46,  
10 and 49 had ridge shapes similar to Examples 1-3 with the spacing and orientation indicated in Table 5 below. The liners of Examples 44, 47, and 48 had bimodal ridges with a groove down the center of the ridge that was not as deep as the ridge  
5 microembossed with small pits and the pits filled with fine glass beads as described plasticized, white 46 micron PVC film. For Example 49, Pressure Sensitive  
15 Adhesive Solution 3 was used. Microscopy clearly showed both protruding mounds that provided slide feature and recessed crossing channels in the exposed pressure sensitive adhesive layers after removal of the liner. Examples 44, 47, and 48 showed bimodal channels with shallow center adjacent to deeper recesses. The  
20 average channel widths recorded include the combined distance between the outer edges, and the depths of the channels were determined from the deepest valley height at the edges of the ridge. For Examples 43-48, Pressure Sensitive Adhesive Solution 1 was coated onto the liner and dried at 66°C and laminated to cast

regions of the channels. The results are summarized in the following table:

Table 5. Data for Examples 43-49

Example	43	44	45	46	47	48	49
Engraved Roll Temp (°C)	-	107	111	111	110	110	107
Silicone Roll Temp (°C)	-	121	116	116	116	116	121

Nominal Width (microns)							
Ridge Angle from Roll Circumference (degrees)	-	45	0	0	45	45	45
Liner Ridge Width (microns)..	0	150-160	100	100	250	250	150-160
Liner Ridge Height (microns)	0	18-20	10-18	10-15	15-20	15-20	15-20
PSA Thickness (microns)	32	30	48	33	41	30	25
Nip Force (N/mm)	-	11	11	11	11	11	16.5
Engraved Roll Channel	-	76	51	51	127	127	76
PSA Channel Depth (microns)	0	14	14	9	10	13	--
PSA Channel Width (microns)	0	170	87	75	220	250	--
Rivet Panel Test	40 mm after 5 min.	10 sec.	20 sec	30 sec	25-30 sec	30 sec	20 sec
Air Bleed Test - 175g/ 5 cm	>3600	<1	40	--	21	--	--
liner ridge/ PSA channel spacing (mm)	0	0.77	0.77	0.77	1.27	1.27	0.77
cm Roller (sec)	00						
Rivet/Corrugated Panel Test	poor	very good	fair-good	fair-good	fair	fair-good	--

Examples 50-58.

Laminated film constructions were prepared according to the general procedures of

5 Examples 9 and 44 using a release liner made of either double-microembossed

Roller (sec)							
Air Bleed Test - 1235g/ 7.5	>1730	<1	50	--	22	--	31 sec

the same as that of Example 9. The pattern and orientation of the two sets of intersecting parallel ridges on the liner and corresponding microchannels of the pressure sensitive adhesive are indicated in the table below. Resulting pressure sensitive adhesive layer channel dimensions were changed either by changing the

changing the embossing conditions (temperature and pressure). The results of the evaluations are shown in the table below.

Table 6. Data for Examples 50-58

Example	50	51	52	53	54	55	56	57	58
Liner Type	PET	PET	PET	PET	PET	PET	PET	paper	paper
Pattern	square	square	square	square	square	square	square	diamond	square
Orientation*	45°	45°	45°	45°	45°	45°	45°	30°	0°

5 groove dimensions of the engraved plate used for embossing the release liner or by

Parameter (mm)									
PSA Channel Width (microns)	120	110	100	90	100	95	110	450 (bimodal channel)	75
PSA Channel Depth	12	11	8	7	7-11	6-9	5-8	10	6-9
Channel Spacing (μm)	2.5	2.5	2.5	2.5	1.3	1.3	1.3	2.5	0.8
Hot Appl/ Reappl Test	2	1-2	1	1	2	2	2	1	2
Indent Panel Test	3	2	1-2	1	3	2-3	0	0	0-1
Rivet Panel Test	---	---	---	---	90 sec.	120 sec.	195 sec.	20 sec.	30 sec.
Slide Test (microns)	1	2	2	2	2	2-3	1-2	1	1
Peg Height	5-9	7-9	7-10	6-10	10-13	8-10	10-13	up to 16	13-18

### Examples 59-66.

The microridged liner of Example 9 was coated with Pressure Sensitive Adhesive Solution 1 as in Example 9 at different thicknesses as seen in Table 7, and laminated to 46 micron thick plasticized white PVC film. All showed good

microchannels for fluid egress remained, regardless of the thickness of the adhesive.

Table 7. Data for Examples 59-66

Example	59	60	61	62	63	64	65	66
Nominal Thickness of PSA 1	18	25	30	36	43	46	51	58
Appl/Reappl Test							"	

5 application properties regardless of the thickness of the adhesive. Surprisingly, the

10

### Example 67.

Samples were cut from the liner/pressure sensitive adhesive/film constructions of Examples 9, 13, 18, 21, 24, 27, 29, and 32. Glass plates were cleaned with cleanser, rinsed with water, and dried with a paper towel. Pieces (7.5 cm by 7.5

(microns)								
Hot	"good"	"good"	"good"	"good"	"good"	"good"	"good"	"good"

rubber roller. The "channel" width not contacting the glass was determined by microscopic examination through the glass. The percent area represented by the open channels relative to the total sample contact area at the glass interface was  
 20 calculated from the widths of the channels, the channel spacing, and the estimated percent of original channels still open. The glass plate panels with the adhered samples were placed in either 22°C, 50% relative humidity room (CTH) or in a  
 15 66°C oven. After the indicated dwell times the channels were examined to see if (cm) of the first set of film samples were cut, peeled away from the microridged release liner, and applied onto the glass using a 1235 g, 40 durometer, 7.5 cm wide

calculated. For these examples, as the calculated percent area dropped to about 5% or less, individual channels tended to close off in random fashion making area coverage difficult to measure. A 0% calculation indicates that essentially no channels were left.

Table 6. Data for Example 67

Sample from	PSA	Film	% Area as Open Microchannels at Glass Interface				
			1 hr at CTH	24 hr at CTH	8 days at CTH	24 hr at 66° C	8 days at 66° C
Ex. 9	1	PVC (46 microns)	14	11	11	11	11
Ex. 13	1	PET (48 microns)	11	11	11	10	10
Ex. 18	2	PVC	10	5	0	0	0

5

Ex. 24	4	PVC	12	12	12	7	0
Ex. 27	4	PET	10	12	12	10	<5
Ex. 29	6	PVC	12	12	-	10	9
Ex. 32	6	PET	12	12	-	11	10

#### Example 68.

Samples were cut from the liner/pressure sensitive adhesive/film constructions of

10 Examples 9, 13, 18, 21, 24, 29, and 32 (using 46 micron PVC or 48 micron PET

Ex. 18	2	PVC	10	5	0	0	0
Ex. 21	2	PET	11	5	<1	0	0

Since Test and were recorded as the initial results. The microridged liners were

removed and the film samples laminated onto relatively smooth silicone-coated paper release liner using a Vanquisher roll laminator at 200 kPa(30 psi) and a

15 speed of about 2.5 cm/sec. Control samples retaining the microridged liner were also evaluated for Examples 18 and 24. The samples were placed in a 66°C oven for 1 week and then removed from the oven to equilibrate to room temperature.

The release liner was removed and the pressure sensitive adhesive was examined

(films). Pieces were subjected to the Hot Application/Reapplication Test and the Slide Test and were recorded as the initial results. The microridged liners were

Sample 68 Table 9. Data for Exchange

to Liner		Initial Results Prior to Exchange			Liner-Exchanged Samples after 7 days at 66°C		
Sale #	R PSA	Film	Slide Test Rating	Hot App./ Channels Present Reapp. Rating Test	Slide Test Rating	Channels Present?	Hot App./ Reapp. Test Rating
E1	1	PVC	1-2	Yes "good" "good"	4	Yes	-
E2	1	PET	2	Yes "good" "good"	4	Yes	-
E3	2	PVC	1-2	Yes "poor" "good"	4	No	"good"
E4	2	PET	1-2	Yes "poor" "good"	4	No	-
E5	4	PVC	3	Yes "poor" "good"	4	No	"good"
E6	6	PVC	2	Yes "good" "good"	4	Yes	-
E7	6	PET	2	Yes "good" "good"	4	Yes	-

Examples 69-72.

Pressure Sensitive Adhesive Solution 9 and Pressure Sensitive Adhesive Solution 10 were each coated separately onto the microridged release liner described in Example 9 and dried at 66°C for 10 minutes to afford corresponding pressure

plasticized white PVC film was laminated onto the exposed pressure sensitive adhesive surfaces. Control samples were similarly prepared using the liner of Example 10 with only filled first-emboss pits. The data in the table below indicate improved application performance of the examples of the invention relative to the control samples.

Table 10. Data for Examples 69-72

		Emboss Ridges	Rating	Test Rating	Rating	
69	9	Yes	2	"good"	1-2	20 sec.
70	9	No	2	"poor"	0	36 mm after 5 min.
71	10	Yes	3	"fair"	1	20 sec.
72	10	No	3	"poor"	0	36 mm after 5 min.

Example 73.

EX.	PSA Solution	Liner with Second	Slide Test	Hot App/Reapp	Indent Panel Test	Kivert Panel Test Results
-----	-----------------	----------------------	---------------	------------------	----------------------	------------------------------

apart, were about 110 micron wide, and about 15 microns high. A translucent graphic marking construction was prepared by coating the microridged liner with Pressure Sensitive Adhesive Solution 8, drying at 66°C for 10 minutes to afford a 33 micron thick layer, and laminating a 50 micron red translucent vinyl film (such as used in Scotchcal™ Translucent Film Series 3630-33) onto the exposed surface of the pressure sensitive adhesive layer. A control was prepared using the liner of Example 4. The resulting constructions were peeled from the release liner and A release liner having no first-emboss pits was prepared with an array of microridges as described in Examples 1-3. The microridges were spaced 1.27 mm

sample had bubbles and appeared nonuniform, particularly when viewed from the polycarbonate side while illuminated from the film side. The sample of the current invention appeared uniform and visually acceptable. The samples were placed in a 93°C oven for 5 minutes. No change was seen in the sample of the current

polycarbonate were placed in a 93°C oven for 5 days. Again the sample of the current invention appeared uniform, while the control sample showed large blisters.

10 Example 74.

The film constructions of Examples 18-23 were cut into 2.5 cm X 7.5 cm pieces. Each piece was loosely, but evenly draped onto a clean 40°C glass hot plate and the edges were pressed with a finger with approximately 500 g "force" to

- 5 invention, while the control sample showed more bubbles. Other samples on polycarbonate were placed in a 66°C oven for 3 days. Again the sample of the plate. (This was the same procedure used to set up the Hot
- 15 Application/Reapplication Test). Each sample was then allowed to remain on the hot plate without additional application pressure. The pressure sensitive adhesive layer was allowed to wet out onto the glass plate to provide contact for the remainder of the sample. Large air bubbles were trapped in the control samples
- 20 without microchannels in the pressure sensitive adhesive layer and prevented the samples from bonding uniformly and flat onto the glass plate. Samples with the edges were pressed with a finger with approximately 500 g force to uniformly contact the periphery (from the edge to about 0.5 cm inward) to the glass

microchannels in the pressure sensitive adhesive layer wet out flat and bonded uniformly onto the glass plate after a dwell time of less than 10 minutes.



### Examples 75-77.

Samples were prepared according to the method in Examples 38, 39 and 10 respectively. 2.54 cm by 18 cm strips of material were cut from of the sample with the long dimension of the strip corresponding to the machine direction of the

adhesive side was applied to rigid substrates using a JM PA-1 Hand Applicator.

The application technique is more representative of actual field technique for applying image graphics. The substrates were Alodine Al, Fruehauf white painted Al, 3M™ Controltac™ Plus Graphic Marking Films Series 180-10 Mounted on Al, and 3M™ 9720 UV Ink printed on 3M™ Controltac™ Plus Graphic Marking Films Series 180-10 Mounted on Al. Data are given in Table 11. The results show that essentially the same peel adhesions were obtained for samples with

sample. Approximately 7.6 cm of the liner was removed from a strip, and the

Substrate	Dwell Conditions	Peel Force per 2.5 cm width / std. Deviation (N)		
		Ex. 75	Ex. 76	Control Ex. 77
Aluminum	No aging	36/3	36/3	37/1
"	21°C, 24 hr.	38/1	39/2	40/2
"	66°C, 7 days	40/1	39/1	40/4
"	32/90% RH, 14 days	38/1	39/4	39/1
Painted Aluminum	No aging	24/1	24/2	25/1
"	21°C, 24 hr.	28/1	29/1	29/1
"	66°C, 7 days	33/1	32/3	35/1

microchanneled PSA and control samples.

Table 11. Data for Examples 75-77

"	66°C, 7 days	21/3	21/1	21/2
UV ink coated Controltac™ Plus Film	No aging	12/1	12/2	12/1
"	21°C, 24 hr.	21/1	19/1	21/1
"	66°C, 7 days	28/1	28/1	28/4

### Examples 78-83.

Samples were prepared according to Examples 38, 39 and 10 respectively, except

"	32°C/90% RH, 14 days	29/1	28/3	30/1
Controltac™ Plus Film	No aging	24/1	26/2	24/1
"	21°C, 24 hr.	30/1	28/1	26/1

Examples 81, 82, and 83, the film used was reflective sheeting used in 3M™ Scotchlite™ Reflective Sheeting Series 690. A sample of each reflective construction was bonded to an aluminum panel that had been freshly painted with a two-part urethane paint. The paint had been deliberately undercured. The painted

urethane paint to release CO<sub>2</sub>. After 24 hours, the number of blisters that had formed under the film construction were counted. An excellent result would be zero blisters. The data are shown in the following table. The outgassing test results show that the samples with microchanneled pressure sensitive adhesive layer afforded excellent results, while the control samples showed blistering.

Table 12. Data for Examples 78-83

Example:	78	79	80	81	82	83
Ridged Liner	Yes	Yes	No	Yes	Yes	No
Reflective Film Series	580	580	580	680	680	680
Blisters per m <sup>2</sup>	0	0	4500-8000	0	0	4500-8000

Example 84.

A film construction of Example 9 was subjected to the Cold Application Test. For

Example:	78	79	80	81	82	83
Preparation:	Ex.38	Ex.39	Ex.10	Ex.38	Ex.39	Ex.10

marking. The data are summarized in Table 13.

comparison, a control without microchannels was tested. Films of the invention can be applied at lower temperatures without sacrificing appearance of the

Table 13. Data for Example 84 and Control

Application Temp (°C)	Application Mass (kg)	Cold Application Test-- Ex. 84	Cold Application Test--Control
--------------------------	--------------------------	--------------------------------------	-----------------------------------

10	2	1	7
4.4	6	1	-
4.4	4	1	5
4.4	2	1	-

## Example 85.

A 12.7 cm X 3.8 cm sample of Example 48 was applied to a sealed 500 ml

5 Nalcoene™ polyethylene bottle (Nalco of Rochester, NY) containing gasoline.

10	6	1	2
10	4	1	3

while large blisters had formed under a control sample of 3M™ Controltac™ Plus

Series 180 film (having no recessed channels in the pressure sensitive adhesive layer). Samples of Examples 71 and 72 (50 cm by 75 cm) were tested in a similar

10 manner. After 3 days the sample of Example 71 showed only one large blister and a few smaller blisters while the control sample of Example 72 showed many large blisters.

Even after 2 weeks, no gasoline outgassing blisters had formed under the sample, the invention in various imaging processes.

## Example 86.

A sample of Example 36 was printed using the Scotchprint™ hot lamination

20 process. A preprinted 3M™ Scotchprint™ 8601 Transfer Media was placed print side down onto the vinyl film. The sandwich of microembossed liner, adhesive, 46 micron vinyl film and printed silicone paper was fed through a Scotchprint™

Examples 86-89

15 The next four examples show versatility of the use of products of

temperature 96°C, gauge pressure of 440 kPa, and a feed rate of about 1 cm per second. Once through the laminator, the silicone paper was peeled off leaving the color image bonded to the vinyl film. Subsequent WYCO RST data showed that the microchannels in the pressure sensitive adhesive layer had a nominal width of

lamination process did not significantly alter shape or dimensions of the microchannels. The imaged vinyl film construction had a Hot Application/Reapplication Test rating of "good." Further, the microchannels did not adversely affect the transfer process or aesthetics of the imaged graphic.

10

#### Example 87.

A pressure sensitive adhesive backed graphic film of Example 9 (about 25 cm by  
80 microns, and an average depth of 14 microns. This data indicated that the hot  
exposure unit (Murray Hill, NJ) at 0.168 J/sq. cm., screenprinted with an overprint  
clear, and cured again. The resulting imaged graphic showed excellent visual  
appearance. Samples of the imaged graphic were evaluated and had excellent  
application properties. The Slide Test rating was 2, the Hot  
Application/Reapplication Test rating was "good", the Indent Panel Test rating was  
4, and the Rivet Panel Test required only 25 seconds.

20

30 cm) was screen printed using a 390 mesh screen with 3M™ Scotchcal™ UV  
Screen Printing Ink Series 9700, focus cured with an American Ultraviolet Co.  
58 micron white PET ink jet imageable film having the same ink jet receptor  
coating as 3M™ Scotchprint™ 8501 Clear Ink Jet Film was used. The construction  
was imaged on a Hewlett Packard Design Jet 755 CM ink jet printer with settings  
of "Best" and "Clear Film Mode." An acceptable color image was produced. The  
film was evaluated and gave a Hot Application/Reapplication Test rating of "good"  
and a Slide Test Rating of 3.

25

#### Example 88.

This example was prepared according to the procedures of Example 9 except that a

Example 89.

Letters (3 and 4 cm tall) were cut into the pressure sensitive graphic film of Example 9 on a flatbed knife cutter. The weight was set so that the knife also

was easily removed. Prespace tape (3M™ SCPS-2) was laminated by hand onto some of the film letters. The liner was removed, and the film letters with prespace tape adhered applied onto clear, smooth polycarbonate panel by hand without a plastic squeegee. (This process in usual practice results in poorer application.)

- 10 The prespace tape was peeled off and the letters were pressed down by hand to afford a uniform application with no observable bubbles trapped under the letters. In a process that usually would afford poor application results, letters were also
- 5 made a slight surface cut into the release liner. The area around the letters (weed)
- 15 that were uniformly applied. Also, no bubbles were formed after the panel was placed in a 66°C oven for 2 hours.

Example 90.

The general procedure of Examples 1-3 was used to emboss the polycoated PET release liner with a metal roll having an engraved pattern of parallel non-intersecting 90 degree V-grooves (1.3 mm apart) oriented parallel to the

20 applied without using the prespace tape. Again, uniform contact of the pressure sensitive adhesive against the panel was achieved, resulting in applied markings 80 microns wide and 17 microns high. Pressure sensitive adhesive 1 was coated onto the liner and laminated to 46 micron white plasticized PVC as described in

- 25 Examples 1-3 to afford a smooth film construction. After removal of the liner, the pressure sensitive adhesive layer had parallel V-groove microchannels about 85 microns wide and 17 microns deep. Evaluation of the film construction gave a Slide Test rating of 4, a Hot Application/Reapplication Test rating of "good" with the microchannels oriented across or down the length of the strip, an Indent Panel
- 30 Test rating of 4, and a Release Test rating of 4. The release liner was embossed with a triangular pattern with a pitch of 1.3 mm. This afforded a release liner with triangular ridges about 80 microns wide and 17 microns high. Pressure Sensitive Adhesive 1 was coated

bubbles, indicative of air escape, formed at the two edges of the sample connected by the microchannels to the circular indent.

#### Example 91.

was the polycoated paper liner described in Examples 43-49 with filled first-microembossed pits. The measured pressure sensitive adhesive microchannels were about 86 microns wide and 18 microns deep, and the protruding posts were about 14 microns high. Evaluation of the film construction gave a Slide Test rating of 1, a Hot Application/Reapplication Test rating of "good" with the microchannels oriented across the strip, a rating of "fair" with the microchannels oriented down the length of the strip, an Indent Panel Test rating of 3, and a Rivet Panel Test time

5 The procedures of Example 90 were repeated, but the release liner microembossed  
15 Example 92.

A polycoated paper release liner, similar to the release liner microembossed in Example 44 except that the first-emboss pits were not filled with glass beads, was microembossed to afford continuous intersecting microridges 1.3 mm apart, about 100 microns wide, about 17 microns high, and oriented 45 degrees to the  
20 circumference of the roll in a square grid array. The film construction was prepared from this liner by the procedure of Example 44. Surprisingly, analyses of 90 seconds.

adhesive. The sample showed positionability at room temperature and a Slide Test rating of 3. The Hot Application/Reapplication Test rating was "good", the Indent  
25 Panel Test rating was 3-4, and the Rivet Panel Test time was 20 seconds.

#### Example 93.

A film construction was prepared as described in Example 9 except a 13 micron flexible polyethylene film (the backing for Tegaderm™ tape from 3M) was  
30 translucent. The sample showed positionability at room temperature and a Slide Test rating of 3. The Hot Application/Reapplication Test rating was "good", the Indent Panel Test rating was 3-4, and the Rivet Panel Test time was 20 seconds. The sample showed positionability at room temperature and a Slide Test

in the pressure sensitive adhesive) was prepared using the same film. Samples 5 cm by 5 cm were adhered onto the skin of a person's back. After completion of a strenuous sweat-producing workout, the samples were examined for water accumulation 5 minutes later and rated on a scale of 1-5 with 1 being the best. The

control sample had a rating of 3 and showed water blisters between the pressure sensitive adhesive layer and the skin.

Examples 94-96.

- 10
- Highland <sup>TM</sup> Brand 3565 box sealing tape (polypropylene film with a rubber resin PSA from 3M) was laminated onto the doubly microembossed microridged release liner of Example 9 using a roll laminator with a Shore A 85 durometer rubber roll
- 5
- sample with microchanneled pressure sensitive adhesive had a rating of 2. The
- 15
- the tape was laminated to two types of control release liners without microridges: one having the same liner material with only filled pits of the first emboss (Example 95), and one having no first-emboss pits (Example 96). The results are shown in the following table:

20

Table13. Data for Examples 94-96

Example	Microchannel	Protruding	Slide Test	Hot Application/	Rivet Panel
at room temperature and a smooth metal backup roll at a temperature of about 93°C, a nip force of 16 N/mm, and speed of one meter/minute. In similar fashion,					
94	Yes	Yes	1-2	"good"	75 seconds
95	No	Yes	1	"poor"	34 mm after 5 min.
96	No	No	4	"poor"	--

Example 97.

A sample of 3M<sup>TM</sup> Controltac<sup>TM</sup> Plus Graphic Marking Film was placed film-side

down onto a glass plate.	A wooden stylus was pressed into the liner side to scribe				
s in PSA	Pegs in PSA	Rating	Reapplication	Test	
			Test Rating		

manner as generally described in Example 1 of U.S. Pat. No. 5,268,228 (Orr). The film side of the laminate showed visible protruding ridges. The sample was applied onto a glass plate at room temperature and applied in a process similar to the Hot Application/Reapplication Test. Air bubbles were trapped in the sample temperature.

#### Examples 98-100.

Example 98 was made using a shape memory pressure sensitive adhesive consisting of 90 parts isooctyl acrylate, 10 parts acrylic acid, 0.05 parts hexanediol diacrylate, 0.30 parts Irgacure 651 photoinitiator from Ciba-Geigy (Hawthorne, NY) and 4 parts of poly(octadecyl acrylate) prepared and cured between a smooth and many channels were sealed. More bubbles formed after 16 hour dwell at room a tape with about 120 microns of shape memory pressure sensitive adhesive on a backing.

The smooth release liner was removed from the tape and an embossed release of Example 39 was used to emboss the free surface of the adhesive by pressing the warm adhesive against the room temperature embossed release liner in a WG36 laminator (Robert L. Greig Co., Stoughton, WI) with the top roll at 65°C and the release liner and a 50 micron PET film backing by the method disclosed in U.S. Patent Application Serial No. 08/660,219 (Silver et al.) filed June 3, 1996 to make microchannels in the adhesive. Examination of the tape showed a pattern of microchannels in the adhesive surface and posts above the surface corresponding to the pattern of the release liner. The dimensions were not measured. The Hot Application/Reapplication Test gave a "fair" rating when done quickly. A sample heated to about 40-43°C for 10 mins. lost the embossed topography and had a Hot Application/Reapplication Test rating of "poor". A sample tested at 25°C had a bottom roll at 25°C. The tape had a 90° wrap around the top roll and the embossed liner had no wrap on either roll. The air pressure on the rolls was set at 80 psi (550 kPa).



Example 99 was identical to Example 98 except an embossed release liner from Example 73 was used. Test results were the same as in Example 98, except the Slide Test Rating was 4.

3M<sup>™</sup> Micropore<sup>™</sup> tape, silicone release coated) was used as a microembossing tool. The release coated nonwoven fabric made a random pattern of microchannels on the adhesive surface. The sample gave a “good” rating on the Hot Application/Reapplication Test when performed at 25°C. But when heated to 40-43°C, the microchannels disappeared and the Hot Application/Reapplication Test rating was “poor”. These thermomorphic adhesives show how an adhesive topography can be controlled in the fourth dimension: an effective period of time.

Example 100 was identical to Example 98 except a nonwoven fabric (as used in Example 98) was used as the release liner.

The general procedure of Examples 1-3 was used to prepare both silicone coated polycoated PET and polycoated paper release liners having a parallel array of triangular ridges about 4-6 microns high and 54 microns wide spaced 1.3 mm apart. These liners were placed onto the adhesive side of 3M™ Scotchcal™ Heat Activated Translucent Film Series 825 and passed through a hot nip laminator at 93°C, 30 cm/min, and 1.7 N/cm nip force. Sheets (about 30 cm by 60 cm) of the resulting microchanneled material and of control material without

Example 101.

Series 945 GPS in a hot laminating vacuum applicator bed at 70 °C, and the vacuum diaphragm was closed. After a 5 minute vacuum cycle, the temperature was increased to 93°C for 2 minutes. The control film exhibited significant air entrapment caused by the edge of the tacky film becoming adhered to the substrate during initial application prior to removal of air from under the sample. The sample with microchannels showed no air entrapment, and the appearance of the applied film on the substrate was not perceptibly altered by the presence of air release channels.

microchannels were placed adhesive side down onto 3M™ Panaflex™ Substrate Series 945 GPS in a hot laminating vacuum applicator bed at 46°C, and the

The invention is not limited to the above embodiments. The claims follow.

What is claimed is:

1. A method of controlling the topography of an adhesive surface,  
comprising:

forming a microreplicated adhesive surface, such that when an adhesion interface is  
established between the layer of adhesive and a supporting substrate, the  
topography of the adhesive surface controls the performance of the adhesion  
interface between that adhesive and the supporting substrate.

10

2. The method according to Claim 1, wherein the contacting step is  
selected from the group consisting of casting techniques, coating techniques, and

5

contacting a microembossed pattern to a layer of adhesive and

15

3. The method according to Claim 2, wherein the casting technique  
comprises using a tool having a microembossed pattern, wherein the coating  
technique comprises coating an adhesive onto a release liner having a  
microembossed pattern, wherein the compressing technique comprises passing  
through a nip roll to compress pressure sensitive adhesive against a release liner.

20

4. The method according to Claim 3, wherein the microembossed  
compressing techniques.

micromachining, knitting, scoring or cutting.

25

5. The method according to any Claims 1-4, wherein the  
microembossed pattern resides on a release liner or on a tape backing.

6. The method according to any of Claims 1-5, wherein the  
microembossed pattern is a multiple microembossed pattern.

30

pattern on the tool is formed by etching, photolithography, stereolithography,  
micromachining, knurling, scoring or cutting.

7. The method according to any of Claims 1-6, wherein rheology of the adhesive retains the microreplicated adhesive surface for an effective period of time.

the step of contacting the microreplicated adhesive surface to the supporting substrate to provide controlled fluid egress from the interface between the adhesive surface and the supporting substrate.

10                    9. The method according to Claim 6, wherein different types of materials are introduced into recesses of differing depths of the multiple microembossed pattern.

5                    8. The method according to any of Claims 1-7, further comprising  
15 interconnected microreplicated adhesive surface.

11. The article according to Claim 10, wherein the microreplicated adhesive surface has a complex pattern of differing depths or heights.

20                    12. The article according to any of Claims 10-11, wherein different types of materials reside on the microreplicated adhesive surface.

10. An article comprising a layer of adhesive having an  
15. The article according to any of Claims 10-12, wherein rheology  
of the adhesive retains the microreplicated adhesive surface for an effective period  
25 of time.

14. The article according to any of Claims 10-13, further comprising a supporting substrate and an interface between the supporting substrate and the microreplicated adhesive surface, wherein the microreplicated

13. The article according to any of Claims 10-12, wherein rheology

15. A method of using a release liner having a microembossed pattern, comprising the steps of:

- (a) contacting the microembossed pattern to a layer of adhesive and
- (b) forming a microreplicated adhesive surface.

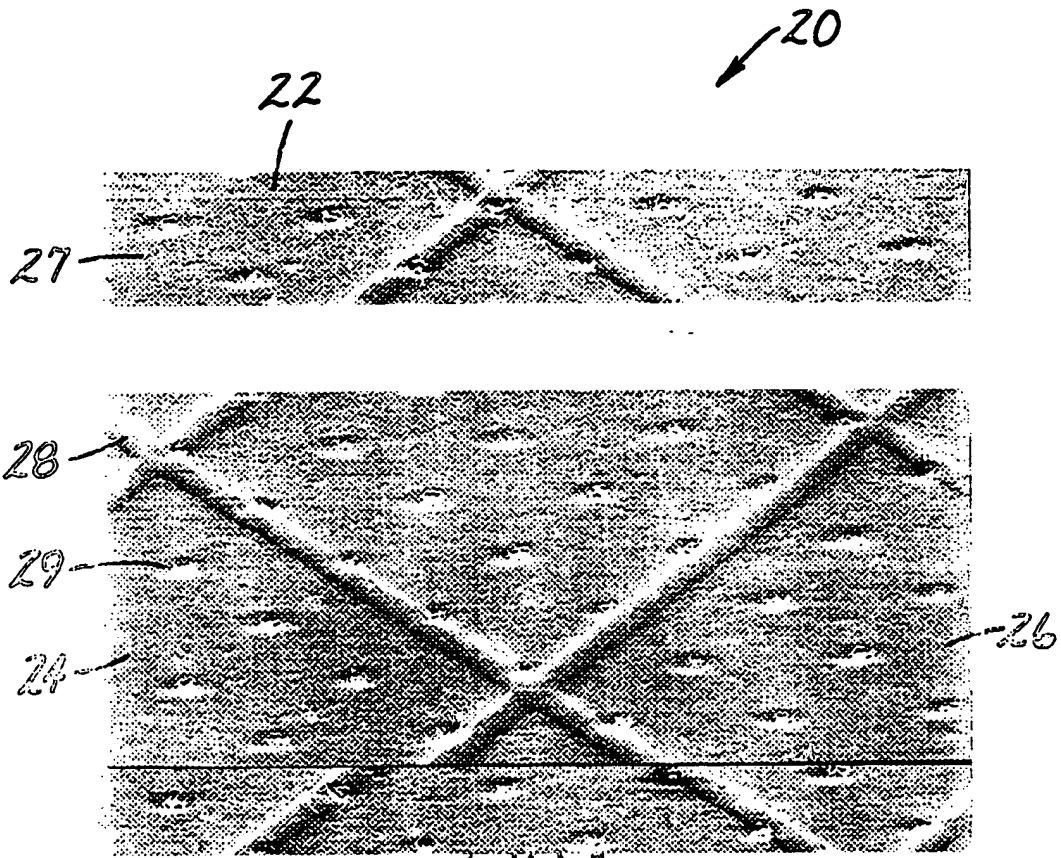


FIG. 1

— 100µm

FIG. 1



FIG. 2

100µm

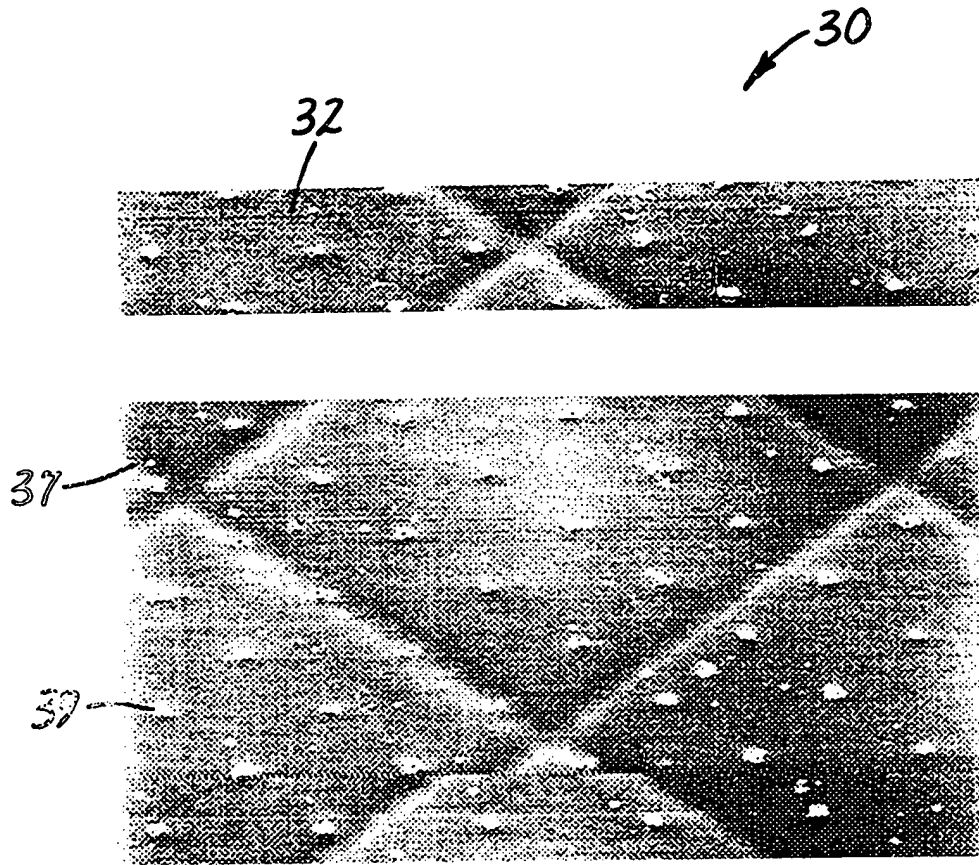


FIG.3

— 100μm



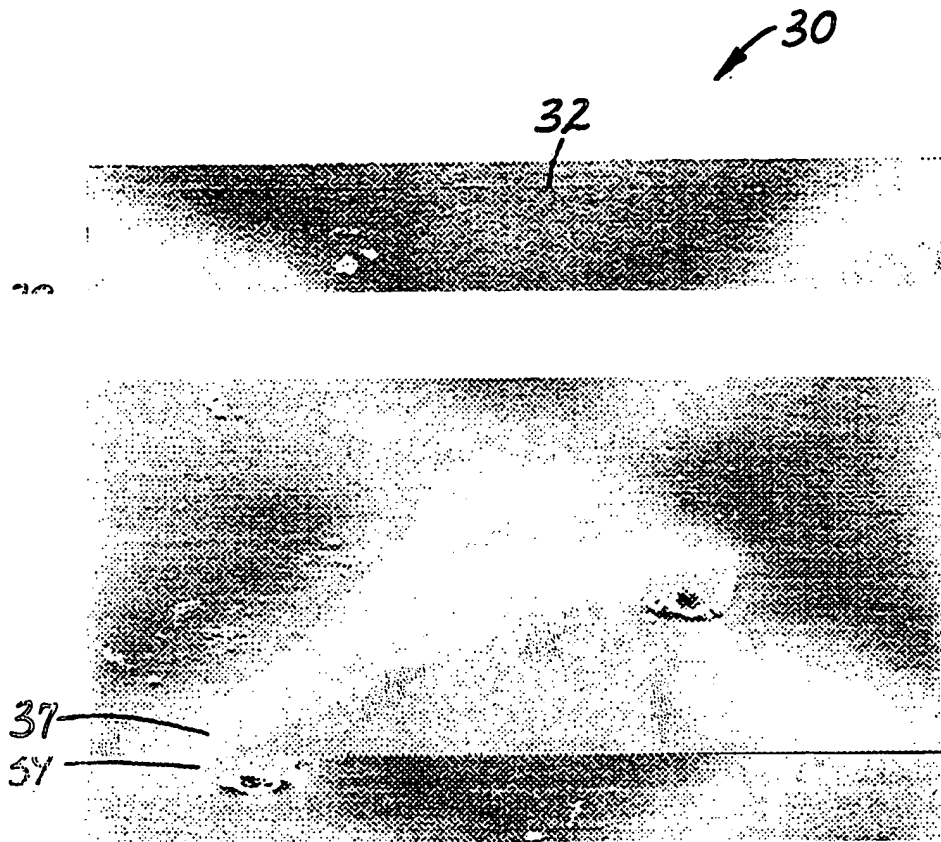


FIG.4



A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 C09J7/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X IPC 6 C09J	PATENT ABSTRACTS OF JAPAN	1-3,5,6
A	see abstract; figure --- EP 0 459 059 A (MINNESOTA MINING & MFG) 4 December 1991 see page 3, line 5-35; figures see claims 1,8,9	1,6,9
A	PATENT ABSTRACTS OF JAPAN vol. 018, no. 578 (C-1269), 7 November 1994 & JP 06 212131 A (SEKISUI CHEM CO LTD), 2 August 1994, see abstract; figure vol. 095, no. 007, 31 August 1995 & JP 07 090231 A (SEKISUI CHEM CO LTD), 4 April 1995.	1-15

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

SEE ABSTRACT, figure ---	Date of mailing of the international search report -/-
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer  Oudot, R

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 096, no. 008, 30 August 1996 & JP 08 100155 A (KURAMOTO SANGYO:KK), 16	1-15
	April 1996, see abstract -----	

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0459059 A	04-12-91	AU 629101 B	24-09-92
		AU 7104991 A	07-11-91
		CA 2036671 A	06-09-91
		DE 69011097 D	01-09-94
		DE 69011097 I	20-01-95
		MX 173296 B	14-02-94